

Technology Paper

Enterprise-Optimized 6Gb/s SAS Rivals Fibre Channel Performance and Scalability at Lower Cost

Introduction


In just a few short years Serial Attached SCSI (SAS) has fundamentally altered the enterprise storage landscape. Building on the rock-solid reliability and robust command set of its parallel SCSI predecessor, SAS raised the storage bar with an unprecedented combination of performance (3-Gb/s transfer rate), scalability (thousands of devices in one domain) and flexibility (compatibility with SATA).

In Q3 2005, 3Gb/s SAS systems entered the market and by 2007 were shipping in volume quantities. SAS has supplanted parallel SCSI as the direct-attached SCSI interface of choice throughout the enterprise; indeed, it was one of the fastest interface transitions in market history.

This rapid transition relied on the close working relationship between the SCSI Trade Association (STA) and the T10 Committee. The STA focuses on identifying SCSI's marketing requirements and providing the forum to reach a consensus on features and benefits found on the SCSI roadmap, while the role of the T10 Committee is to develop standard specifications to make it possible for those features and benefits to be implemented in commercial products.

The T10 Committee developed the new SAS-2 technical specification (SAS protocol and physical interface enhancements for transporting SCSI over serial links at up to 6 Gb/s), and the STA has given the marketing name "6Gb/s SAS" to this new industry standard (see Figure 1).

Enterprise-Optimized 6Gb/s SAS Rivals Fibre Channel Performance and Scalability at Lower Cost

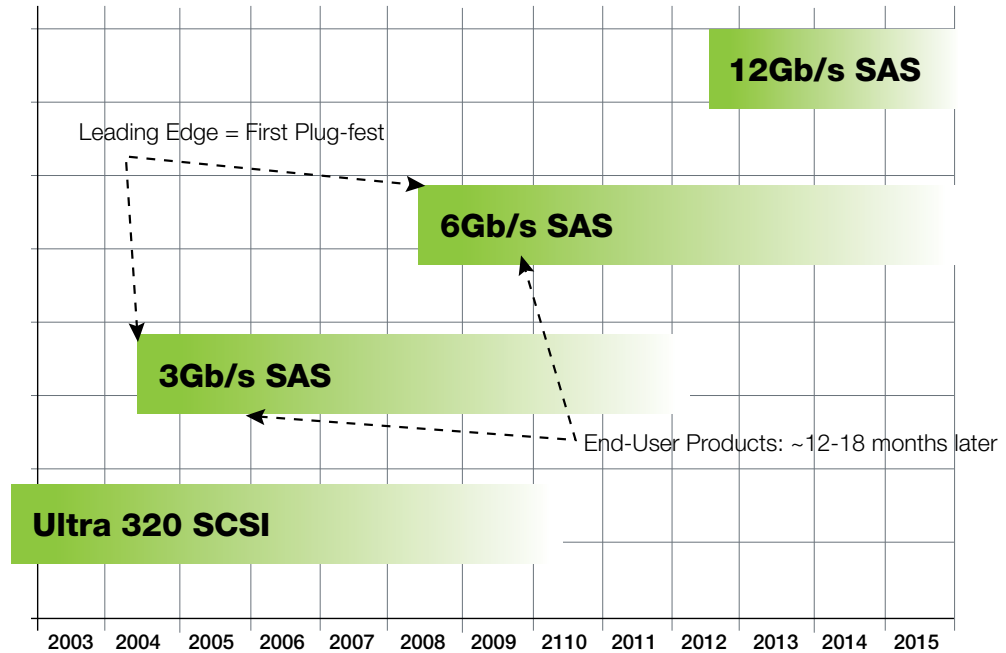

Graphic copyrighted by SCSI Trade Association

Figure 1. SAS Roadmap

With the recent introduction of this new SAS-2 standard specification, SAS is once again poised to rewrite the rules for enterprise storage, this time setting its sights on the data center’s premier interface, Fibre Channel (FC).

According to the STA, “6Gb/s SAS has many enhancements beyond 3Gb/s SAS. It has more bandwidth per connection, greater scalability and enhanced features. 3Gb/s SAS usage models will be preserved in 6Gb/s SAS along with the retention of 1.5Gb/s and 3Gb/s SAS/SATA compatibility. There are many other targeted improvements beyond first-generation 3Gb/s SAS, assuring enterprise storage users that SAS technology will continue to meet their needs.”

While its blazing 6-Gb/s transfer rate (double that of the previous generation) is the most obvious attribute of the SAS-2 specification, a comprehensive suite of additional enhancements enables 6Gb/s SAS to rival FC solutions in a variety of enterprise storage environments—at significantly lower cost. What’s more, 6Gb/s SAS does so while retaining compatibility with earlier SAS and SATA hard drives.

Key 6Gb/s SAS features include standardized expander zoning and expander self-discovery,

which enable more secure and efficient scalability when deploying the enormous number of drives increasingly found in high-end enterprise arrays. Factor in the faster throughput, longer maximum cable lengths and greater signal integrity, it’s clear that 6Gb/s SAS is a compelling, cost-effective rival to FC in many network storage applications.

More Storage, Less Expense

Satisfying the enterprise’s relentless hunger for more storage capacity and faster throughput poses a difficult challenge for today’s storage professionals, who are simultaneously expected to cut costs whenever possible. FC has long been the favored interface for a variety of network storage architectures used in enterprise data centers:

- SAN (storage area network)
- NAS (network attached storage)
- JBOD/RAID (just-a-bunch-of-disks/redundant array of independent disks)

Of course, FC is also known for coupling its remarkable throughput and scalability with daunting cost. Beyond the substantial investment required for the infrastructure itself, Fibre Channel solutions also entail complex deployment and management procedures that require highly

Enterprise-Optimized 6Gb/s SAS Rivals Fibre Channel Performance and Scalability at Lower Cost



6Gb/s SAS: Performance, flexibility and value in affordable and easy-to-manage storage environments	
Feature Function	Benefit
6-Gb/s transfer rate	Enables enterprise-class performance at 2x the throughput of today's SAS/SATA environments
Standardized expander zoning	Provides common infrastructure with seamless scalability
Expander self-discovery	Provides common infrastructure with seamless scalability
10-M cable length	Extends connectivity by 66 percent supporting networked storage expansion beyond a single rack
Greater signal integrity with SSC	Enables 6Gb/s SAS drives installed in close proximity to one another without compromising data integrity
Cost-effective simplification	Simplified connectivity with standardization on mini SAS connectors
Investment protection	Retains compatibility with earlier SAS/SATA hard drives and SCSI software/middleware
Management efficiencies	Utilizes existing IT SCSI expertise

Figure 2. Features and Benefits of 6Gb/s SAS

specialized (and expensive) expertise not found in many IT departments. Hence, FC has typically been limited to enterprises with the needs (and deep pockets) to justify its use.

Devices with 6-Gb/s transfer rates deliver greater performance, flexibility and value in traditional direct-attached applications such as internal server storage. But more importantly, 6Gb/s SAS storage solutions now offer an affordable, easy-to-manage alternative to FC in network storage environments. Achieving this capability required several key enhancements to the SAS standard developed by the T10 Committee¹.

These new key enhancements are detailed in the following sections:

Standardized Expander Zoning

Standardized expander zoning provides common infrastructure with seamless scalability. While the SAS-1 specification theoretically enabled enormous addressability (up to 128 expanders, each supporting up to 128 SAS devices), in practice, even a few hundred storage devices or subsystems required some type of zoning scheme to assign storage domains when used with multiple hosts.

This capability, known as expander zoning, was not formally defined in the SAS-1 standard. As such, such zoning could be implemented in a variety of vendor-specific, and frequently incompatible, ways that result in zoning incompatibilities that can lead to inaccessible storage and/or limit customers to single-vendor solutions. To eliminate such incompatibilities, standardized expander zoning is part of the SAS-2 specification and a required feature in all 6Gb/s SAS expanders. Furthermore, expanders can now support up to 256 devices.

What's more, 6Gb/s SAS expanders support secure zones, similar to fibre channel SAN zones. Utilizing *denial of service* and *device access control by zone* technologies, networked storage can be grouped so that multiple hosts may talk to the expander, but see only a specified subset of the storage devices. This provides greater data security and makes storage easier to manage in the multi-drive network storage environments typical of enterprise data centers.

¹ The T10 Committee (www.t10.org/) is part of the International Committee on Information Technology Standards (INCITS) and is accredited by, and operates under rules approved by the American National Standards Institute (ANSI). These rules are designed to ensure that voluntary standards are developed by the consensus of industry groups such as SCSI Trade Association (SCSITA, www.scsita.org).

Enterprise-Optimized 6Gb/s SAS Rivals Fibre Channel Performance and Scalability at Lower Cost



Expander Self-Discovery

Expander self-discovery simplifies administration while doubling storage scalability. Under the SAS-1 standard, connecting devices to the expanders was a host-based process. As long as the number of SAS drives in the storage pool was relatively small, this discovery scheme was reasonably efficient. But in network storage environments, where massive numbers of drives are typically employed, host-based discovery resulted in increased SAS messaging traffic between hosts and expanders and more time was needed to initialize systems.

The SAS-2 standard resolves this issue by shifting the SAS discovery process from the host to the expander. Enabling 6Gb/s SAS expanders to perform device discovery themselves, automatically and in parallel, makes provisioning large systems of SAS drives both faster and easier to manage. This expander self-discovery technology plays a pivotal role in ensuring seamless scalability as network storage needs (and storage device quantities) inevitably grow.

6Gb/s SAS: Optimized for the Enterprise

While the impressive capabilities of 6Gb/s SAS in network storage environments clearly derived from the inclusion of standardized expander zoning and expander self-discovery technologies, they are not the only aspects of the SAS-2 standard that make 6Gb/s SAS so effective in enterprise storage arrays. Indeed, 6Gb/s SAS incorporates a variety of enterprise-centric features, including:

6-Gb/s Transfer Rate

The 6-Gb/s transfer rate enables rock solid enterprise-class performance at 2x the throughput of today's SAS or SATA environments. Higher throughput is always a desirable feature in any storage solution, but it's particularly important in enterprise data centers, where drives can be repeatedly accessed by multiple initiators. With double the transfer rate of its 3Gb/s SAS predecessor, 6Gb/s SAS delivers the speed necessary to keep up with the demands of high-traffic network storage environments.

Delivering performance that's competitive and significantly less expensive than FC storage solutions, 6Gb/s SAS also offers a more

compelling performance/dollar value proposition than costly solid state drives (SSDs).

10-Meter Maximum Cable Length

A 10-meter maximum cable length extends connectivity by 66 percent supporting networked storage expansion beyond a single rack. 6Gb/s SAS delivers a remarkable 100 percent boost in transfer rate while also enabling the use of longer connecting cables (up to 10 meters, an increase from the 6-meter cables supported by 3Gb/s SAS). Achieving this improvement in throughput and maximum cable length required the use of decision feedback equalization (DFE) technology.

DFE counteracts the signal attenuation effects that arise from greater cable lengths by de-emphasizing lower frequency components at the transmitter and selectively boosting higher frequency components on the receiving end. This enables the use of 10-meter cables with no loss of signal integrity, while still maintaining compatibility with existing 6-meter cables.

This 66 percent increase in maximum cable length pays significant dividends in the data center, enabling far greater flexibility in terms of wide-scale storage system deployment and installation. This cable extension provides the flexibility to expand your network-attached storage beyond the limits of a single rack using a 10-meter cable while ensuring the integrity of the data.

Spread Spectrum Clocking


6Gb/s SAS doubles the data frequency of 3Gb/s SAS; this may result in a loss of cabinet shielding efficiency due to the shorter wavelengths of the signals.

To combat this change in frequency, 6Gb/s SAS employs spread spectrum clocking (SSC), a slow-frequency (30–33 KHz) modulation of the data frequency. By reducing the peak values and spreading the radiated emissions over a broader range of frequencies, SSC helps to reduce EMI-related issues.

Simplified Connectivity

Simplified connectivity standardizes mini SAS connectors for cost-effective SAS solutions. To simplify cabling options and streamline integration, 6Gb/s SAS eliminates the expensive InfiniBand-style (SFF-8470, Figure 3) connector

Enterprise-Optimized 6Gb/s SAS Rivals Fibre Channel Performance and Scalability at Lower Cost

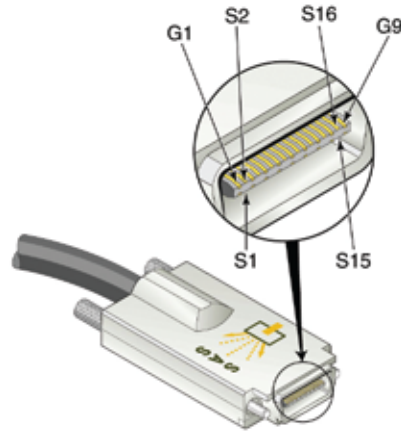

SFF-8470 Multilane 4x Connector (icons on each end)

Graphics copyrighted by SCSI Trade Association, courtesy of Molex.

Figure 3. Costly InfiniBand-style connector used by 3Gb/s SAS


used by 3Gb/s SAS and relies solely on the mini SAS connector for both internal (SFF-8087) and external (SFF-8088, Figure 4) connectivity.

Standardizing on mini-SAS connectors is particularly appropriate for the data center, where these connectors are becoming increasingly commonplace through their use on small form factor (SFF) 2.5-inch hard drives.


Investment Protection With Backwards Compatibility

Given the numerous technical advancements that the new SAS-2 specification incorporates, it may be surprising to learn that 6Gb/s SAS maintains full 1.5Gb/s and 3Gb/s SAS/SATA compatibility. To further ensure seamless interoperability, compatibility with existing SCSI software and middleware is also retained.

Such compatibility is key to ensuring that the enterprise's current installed base of SAS storage solutions will continue to maintain its value as the transition to 6Gb/s SAS gains momentum.

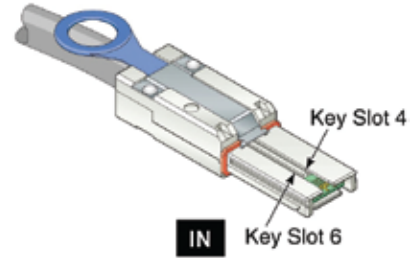

SFF-8088 Mini Multilane 4x Connector (icons & keys on both ends)

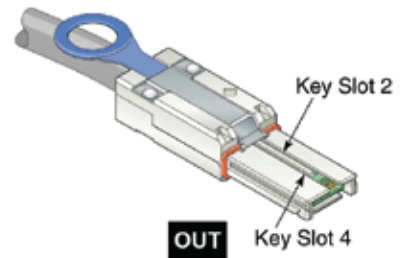

SFF-8088 Mini Multilane 4x Connector (icons & keys on both ends)

Graphics copyrighted by SCSI Trade Association, courtesy of Molex.

Figure 4. Compact, cost-effective, mini SAS connectors used by 6Gb/s SAS

Conclusion

With growing pressure throughout data centers to cut spending while keeping pace with the inexorable demand for more storage capacity and speed, the steep cost and complexity of fibre channel solutions have become increasingly problematic. The arrival of 6Gb/s SAS provides a compelling, cost-effective alternative boasting performance and scalability that rivals fibre channel. 6Gb/s SAS delivers a far simpler and more economically sound alternative to purchase, install and maintain for business sustainability.