






# Game Drive PS5<sup>®</sup> NVMe™ SSD

## **Take Your Gaming Further**

A partnership between PS5<sup>®</sup> gameplay and SSD storage, the Officially Licensed Game Drive PS5<sup>®</sup> NVMe<sup>™</sup> SSD is the optimal drive for gamers. Built to thrive with both the Digital and Standard Editions of PS5<sup>®</sup>, this SSD features up to 7,300/6,900 MB/s sequential read/write speeds, a custom heatsink, and instantly expands your capacity with up to 2 TB of space. Plus, it installs with just a screwdriver.

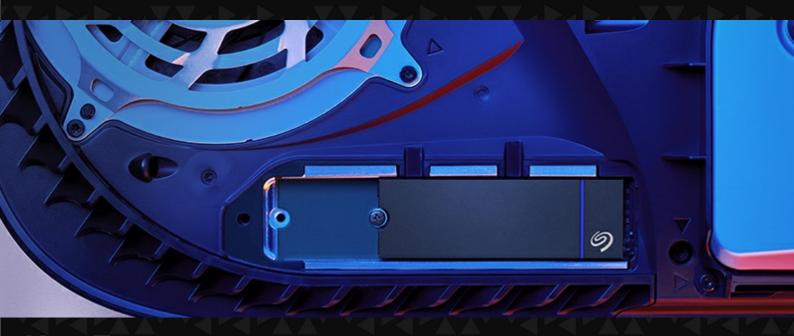

# **Key Features**

### Officially Licensed

Built with matching firmware to seamlessly work with all models of PS5<sup>®</sup>.

#### Cool Speed Ahead

Custom heatsink helps minimise thermal throttling and maintain peak performance for longer periods of time.

#### Download Undate Play

All your PS5<sup>®</sup> and PS4<sup>™</sup> games operate directly from the M.2 SSD.

# **Take Your Gaming Further**



GAME DRIVE PS5® NVME™ SSD

#### Absolute Performance

Up to 7,300/6900 MB/s read/write speeds harnesses the full power of PCIe Gen4.

### **Build Your Game Vault**

Up to 2 TB of capacity means no more sacrificing, deleting, or redownloading games.

#### Install with Ease

Simple drop-in installation for  $PS5^{\text{@}}$  — all you need is a screwdriver.



| BOX DIMENSIO    | NS MASTER CARTON DIMENSIONS   | PALLET DIMENSIONS   |
|-----------------|---|---|
| 6.102 in/155 mi | m 11.496 in/292 mm  | 47.992 in/1219 mm   |
| 4.291 in/109 mi | m 6.024 in/153 mm   | 40 in/1016 mm   |
| 0.945 in/24 mn  | 5.512 in/140 mm   | 44.134 in/1121 mm   |
| 0.24 lb/0.109 k | 2.976 lb/1.35 kg  | 564.383 lb/256 kg   |
|                 |   |   |
| 10              |   |   |
| 168             |   |   |
| 7               |   |   |
|                 | 6.102 in/155 m<br>4.291 in/109 m<br>0.945 in/24 mr<br>0.24 lb/0.109 k | 6.102 in/155 mm 11.496 in/292 mm 4.291 in/109 mm 6.024 in/153 mm 0.945 in/24 mm 5.512 in/140 mm 0.24 lb/0.109 kg 2.976 lb/1.35 kg |

#### SYSTEM REQUIREMENTS

- M.2 (M key) slot, PCIe® G4 ×4 interface (backwards compatible with PCIe G3 interface)
- PlayStation®5 consoles require system software version 21.02-04.00.00 or later.

#### WHAT'S INCLUDED

- Game Drive PS5® NVMe™ SSD
- Quick Install Guide

| REGION | MODEL NUMBER   | CAPACITY | LIMITED WARRANTY<br>(YEARS) | UPC CODE     | EAN CODE      | MULTI-PACK UPC |
|--------|----------------|----------|-----------------------------|--------------|---------------|----------------|
| AMER   | ZP1000GP3A1011 | 1TB      | 5                           | 763649181133 | 8719706436144 | 10763649181130 |
| AMER   | ZP2000GP3A1001 | 2TB      | 5                           | 763649173275 | 8719706430098 | 10763649173272 |
| APAC   | ZP1000GP3A3001 | 1TB      | 5                           | 763649173343 | 8719706430166 | 10763649173340 |
| APAC   | ZP2000GP3A3001 | 2TB      | 5                           | 763649173350 | 8719706430173 | 10763649173357 |
| EMEA   | ZP1000GP3A2001 | 1TB      | 5                           | 763649173305 | 8719706430128 | 10763649173302 |
| EMEA   | ZP2000GP3A2001 | 2TB      | 5                           | 763649173312 | 8719706430135 | 10763649173319 |

| SPECIFICATIONS                                     | 1TB                                 | 2TB                                 |  |
|--|-------------------------------------|-------------------------------------|--|
| Capacity   | 1TB                                 | 2TB                                 |  |
| Standard Model                                     | ZP1000GP300001                      | ZP2000GP300001                      |  |
| Interface  | PCIe Gen4 ×4 NVMe 1.4               | PCIe Gen4 ×4 NVMe 1.4               |  |
| NAND Flash Memory                                  | 3D TLC                              | 3D TLC                              |  |
| Form Factor  | M.2 2280 with heatsink <sup>1</sup> | M.2 2280 with heatsink <sup>1</sup> |  |
| PERFORMANCE  |                                     |                                     |  |
| Sequential Read (Max, MB/s), 128KB <sup>2</sup>    | 7,300                               | 7,300                               |  |
| Sequential Write (Max, MB/s), 128 KB <sup>2</sup>  | 6,000                               | 6,900                               |  |
| Random Read (Max, IOPS), 4KB QD32 T8 <sup>2</sup>  | 800,000                             | 1,000,000                           |  |
| Random Write (Max, IOPS), 4KB QD32 T8 <sup>2</sup> | 1,000,000                           | 1,000,000                           |  |
| ENDURANCE/RELIABILITY                              |                                     |                                     |  |
| Total Bytes Written (TB)                           | 1,275                               | 2,550                               |  |
| Mean Time Between Failures (MTBF, hours)           | 1,800,000                           | 1,800,000                           |  |
| Warranty, Limited (years)                          | 5                                   | 5                                   |  |
| POWER MANAGEMENT                                   |                                     |                                     |  |
| Active Power, Average (W)                          | 6.3                                 | 7.8                                 |  |
| Idle Power PS3, Average (mW)                       | 20                                  | 25                                  |  |
| Low Power L1.2 mode (mW)                           | <5                                  | <5                                  |  |
| ENVIRONMENTAL                                      |                                     |                                     |  |
| Temperature, Operating Internal (°C)               | 0°C – 70°C                          | 0°C − 70°C                          |  |
| Temperature, Nonoperating (°C)                     | -40°C – 85°C                        | -40°C − 85°C                        |  |
| Shock, Nonoperating: 0.5ms (Gs)                    | 1500 Gs                             | 1500 Gs                             |  |
| SPECIAL FEATURES                                   |                                     |                                     |  |
| TRIM   | Yes                                 | Yes                                 |  |
| S.M.A.R.T.   | Yes                                 | Yes                                 |  |
| Halogen Free                                       | Yes                                 | Yes                                 |  |
| RoHS Compliance                                    | Yes                                 | Yes                                 |  |
| PHYSICAL   |                                     |                                     |  |
| Length (mm/in, max)                                | 80.85 mm/3.183 in                   | 80.85 mm/3.183 in                   |  |
| Width (mm/in, max)                                 | 24.22 mm/0.953 in                   | 24.22 mm/0.953 in                   |  |
| Height (mm/in, max)                                | 11.10 mm/0.437 in                   | 11.10 mm/0.437 in                   |  |
| Weight (g/lb)                                      | 46.7 g/0.102 lb                     | 48.7 g/0.107 lb                     |  |

<sup>1</sup> Please verify that your system provides enough space for installation. Game Drive SSD with heatsink exceeds dimensions of a standard M.2 2280 form factor. Heatsink is pre-installed and should not be removed as it can damage the SSD.

#### **SEAGATE.COM**

© 2023 Seagate Technology LLC. All rights reserved. Seagate, Seagate Technology, and the Spiral logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. PlayStation is a registered trademark PS5 is a trademark of Sony Computer Entertainment Inc. All other trademarks or registered trademarks are the property of their respective owners. When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Quantitative usage examples for various applications are for illustrative purposes. Actual quantities will vary based on various factors, including file size, file format, features, and application software. Complying with all applicable copyright laws is the responsibility of the user. Seagate reserves the right to change, without notice, product offerings or specifications. SC12.1-2305 AMER

<sup>2</sup> Fresh out of box (FOB) performance obtained on newly formatted drive. Performance may vary based on SSD's firmware version, system hardware, and configuration. Performance based on CrystalDiskMark v.7.0.0 ×64 on Windows 10 host with PCIe Gen4 motherboard.