

# V15300 Series - Samsung Hard Disk Drive

Model	SV0761D	SV1532D	SV2043D	SV3064D
Capacity	7.6GB	15.3GB	20.4GB	30.6GB
Heads	1	2	3	4
Disks	1	1	2	2

## Contact

Corporate HQ  
Tel. 82-2-751-6886  
Fax. 82-2-751-6939  
Website: [samsungelectronics.com](http://samsungelectronics.com)

US/Canada  
Tel. 1-408-544-5614  
Fax. 1-408-544-5652  
Website: [www.sosimple.com](http://www.sosimple.com)

UK(Europe)  
Tel. 44-181-391-0168  
Fax. 44-181-974-2800  
Website: [www.samsung-storage.com](http://www.samsung-storage.com)

Germany  
Tel. 49-180-5121213  
Fax. 49-180-5121214

Singapore(Southeast)  
Tel. 65-568-7592  
Fax. 65-569-5900

Australia  
Tel. 612-9763-9700  
Fax. 612-9764-6440

HongKong  
Tel. 852-2862-6365  
Fax. 852-2866-1316

India  
Tel. 91-11-631-0564  
Fax. 91-11-693-2607

Japan  
Tel. 81-3-5641-9890  
Fax. 81-3-5641-9861



### Features

- 3.5-inch High Performance Hard Drives
- 15.3GB Capacity per Disk
- Acoustic Noise Suppression Technology
- High Speed Digital Signal Processor(DSP) Based Architecture
- Ultra DMA 66/33 Support
- 5,400rpm Spindle Speed
- 9.0ms Average Seek Time
- 7 way interleave OTF Error Correction
- S.M.A.R.T Compliant
- SSB™
- ImpacGuard™
- NoiseGuard™

### Performance Specifications

Read Seek Time (typical, read)	
Track to Track	0.8 ms
Average	9.0 ms
Full Stroke	17 ms
Average Latency	5.56 ms
Spindle Speed	5,400 rpm
Data Transfer Rate	
Media to/from Buffer(max.)	343 Mbits/s
Buffer to/from Host (max.)	66 Mbytes/s
Buffer Size	512 Kbytes

### Reliability Specifications

Non-recoverable Read Error	1 in 10 <sup>14</sup> bits
MTBF (POH)	500,000 hours
Start/Stop Cycles	50,000
Component Design Life	5 years

### Environmental Specifications

Temperature	
Operating	5 ~ 55°C
Non-operating	-40 ~ 70°C
Thermal Gradient (max.)	20°C/hr

### Humidity (non-condensing)

Operating	5 ~ 85 %
Non-operating	5 ~ 95 %
Altitude (relative to sea level)	
Operating	-650 to 10,000 feet
Non-operating	-1,000 to 40,000 feet

### Shock and Vibration

Linear Shock (1/2 sine pulse, 2 ms duration)	
Operating	63 G
Non-operating	280 G
Vibration (swept sine)	
Operating (1 octave per minute)	
5 ~ 21 Hz	0.034" (double amplitude)
22 ~ 300 Hz	1.5 Gp-p
Non-operating(1 octave per minute)	
5 ~ 21 Hz	0.195" (double amplitude)
22 ~ 500 Hz	8 Gp-p

### Power Consumption (typical)

Voltage	5V ± 5% / 12V ± 10%
Power Up Current(max.)	500 / 1850mA
Read/Write	4.5W
Seek	6.0 W
Idle	4.0 W
Standby	1.0 W
Sleep	1.0 W

### Acoustic Noise

Sound Power (average)	
Idle	3.0 bels
Random Read/Write	3.2 bels

### Physical Dimension

Height	1 inch
Width	4 inches
Depth	5.75 inches
Weight	1.1 pounds

Spinpoint is a trademark of Samsung Electronics Co., Ltd. All brand and product names are trademarks of registered trademarks of their respective companies design and specifications are subject to change without notice.  
©1999 Samsung Electronics Co., Ltd.  
All right reserved.  
Rev.B 6/2000


Distributed by:

# SpinPoint™

V15300

7.6/15.3/20.4/30.6GB

**V** series

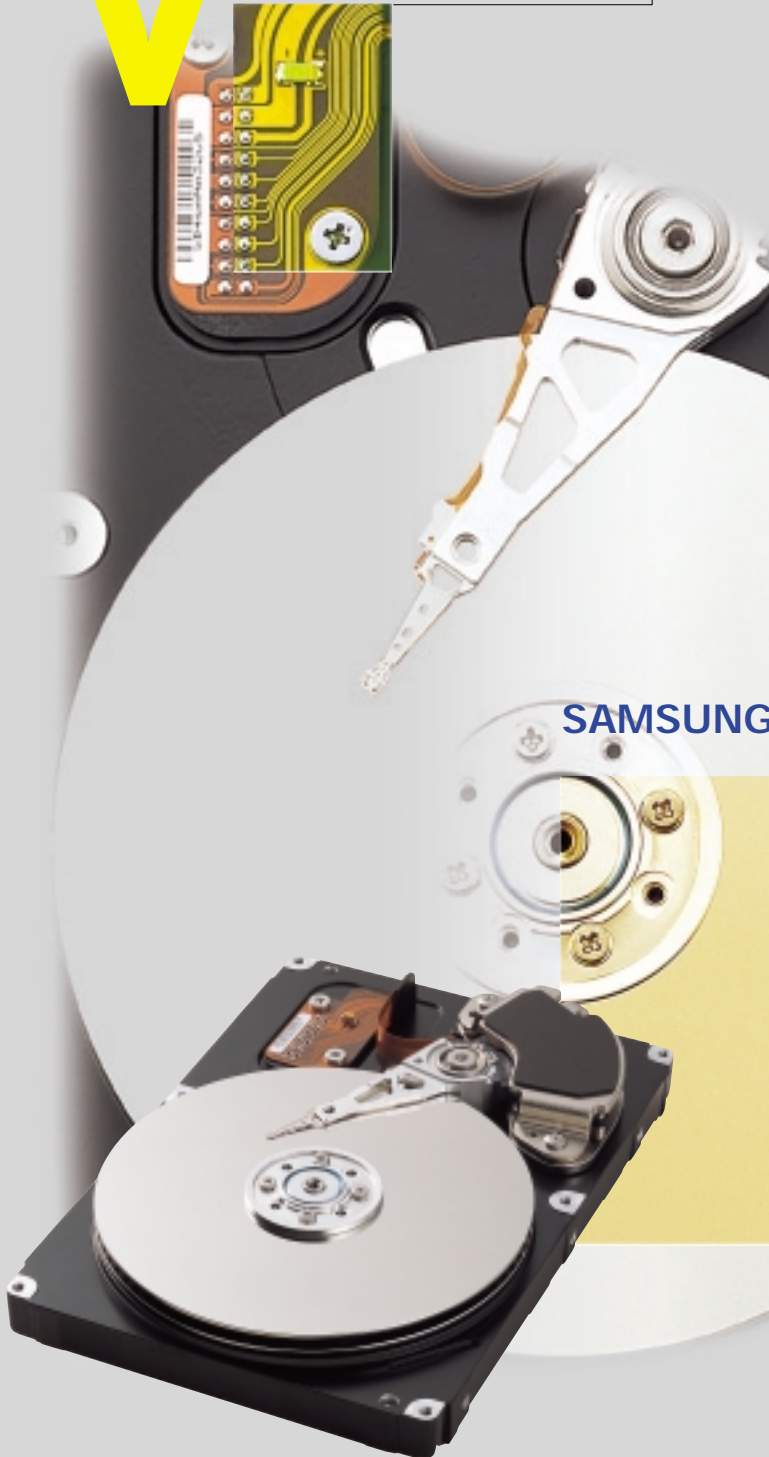

## SAMSUNG HARD DISK DRIVE

- 3.5-inch High Performance Hard Drives
- 15.3GB Capacity per Disk
- 5,400rpm Spindle Speed
- 9.0ms Average Seek Time
- Ultra DMA 66/33 Support
- Acoustic Noise Suppression Technology
- High Speed Digital Signal Processor(DSP) Based Architecture
- 7 way interleave OTF Error Correction
- S.M.A.R.T Compliant
- SSB™
- ImpacGuard™
- NoiseGuard™

**SAMSUNG**