



Product Manual

Momentum® Thin

7200-RPM

Standard models

ST320LT007 - 9ZV142

ST250LT007 - 9ZV14C

ST160LT007 - 9ZV14D

SED model

ST320LT014 - 9YK142

ST250LT014 - 9YK14C

ST160LT014 - 9YK14D

SED (FIPS 140-2) models

ST320LT009 - 9WC142

ST250LT009 - 9WC14C

ST160LT009 - 9WC14D

Gen-2
100625253
Rev. G
November 2012

Document Revision History

| Revision | Date | Description of Change |
|----------|------------|-----------------------------|
| Rev. A | 06/02/2010 | Initial release. |
| Rev. B | 06/24/2010 | fc, 2, 4, 6, 21 & 26-28 |
| Rev. C | 01/04/2011 | 5, 8, 15 & 20. |
| Rev. D | 03/04/2012 | 19-21. |
| Rev. E | 05/10/2011 | 29-30. |
| Rev. F | 06/30/2011 | Fc, 2, 4-6, 14, 26-28 & bc. |
| Rev. G | 11/07/2012 | 11. |

© 2012 Seagate Technology LLC. All rights reserved.

Publication number: 100625253, Rev. G November 2012

Seagate, Seagate Technology and the Wave logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. Momentus and SeaTools are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners.

No part of this publication may be reproduced in any form without written permission of Seagate Technology LLC.
Call 877-PUB-TEK1(877-782-8351) to request permission.

When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Actual quantities will vary based on various factors, including file size, file format, features and application software. Actual data rates may vary depending on operating environment and other factors. The export or re-export of hardware or software containing encryption may be regulated by the U.S. Department of Commerce, Bureau of Industry and Security (for more information, visit www.bis.doc.gov), and controlled for import and use outside of the U.S. Seagate reserves the right to change, without notice, product offerings or specifications.

| | |
|--|----------|
| SEAGATE TECHNOLOGY SUPPORT SERVICES | 1 |
|--|----------|

| | |
|--|----------|
| 1.0 INTRODUCTION | 2 |
| 1.1 ABOUT THE SERIAL ATA INTERFACE | 3 |

| | |
|---|----------|
| 2.0 DRIVE SPECIFICATIONS | 4 |
| 2.1 SPECIFICATION SUMMARY TABLE | 4 |
| 2.2 FORMATTED CAPACITY | 6 |
| 2.2.1 LBA mode | 6 |
| 2.3 DEFAULT LOGICAL GEOMETRY | 6 |
| 2.4 PHYSICAL ORGANIZATION | 6 |
| 2.5 RECORDING AND INTERFACE TECHNOLOGY | 7 |
| 2.6 PHYSICAL CHARACTERISTICS | 7 |
| 2.7 SEEK TIME | 7 |
| 2.8 START/STOP TIMES | 8 |
| 2.9 POWER SPECIFICATIONS | 8 |
| 2.9.1 Power consumption | 8 |
| 2.9.2 Deferred spinup | 9 |
| 2.9.3 Conducted noise | 9 |
| 2.9.4 Voltage tolerance | 9 |
| 2.9.5 Power-management modes | 10 |
| 2.10 ENVIRONMENTAL SPECIFICATIONS | 11 |
| 2.10.1 Ambient temperature | 11 |
| 2.10.2 Temperature gradient | 11 |
| 2.10.3 Humidity | 11 |
| 2.10.4 Altitude | 11 |
| 2.10.5 Shock | 12 |
| 2.10.6 Vibration | 12 |
| 2.11 ACOUSTICS | 13 |
| 2.12 ELECTROMAGNETIC IMMUNITY | 13 |
| 2.13 RELIABILITY | 14 |
| 2.14 AGENCY CERTIFICATION | 14 |
| 2.14.1 Safety certification | 14 |
| 2.14.2 Electromagnetic compatibility | 14 |
| 2.14.3 FCC verification | 15 |
| 2.15 ENVIRONMENTAL PROTECTION | 16 |
| 2.15.1 European Union Restriction of Hazardous Substances (RoHS) | 16 |
| 2.15.2 China Restriction of Hazardous Substances (RoHS) Directive | 16 |
| 2.16 CORROSIVE ENVIRONMENT | 16 |

| | |
|---|-----------|
| 3.0 CONFIGURING AND MOUNTING THE DRIVE | 17 |
| 3.1 HANDLING AND STATIC-DISCHARGE PRECAUTIONS | 17 |
| 3.2 CONFIGURING THE DRIVE | 17 |
| 3.3 SERIAL ATA CABLES AND CONNECTORS | 18 |
| 3.4 DRIVE MOUNTING | 18 |

| | |
|-----------------------------|-----------|
| 4.0 ABOUT FIPS | 21 |
|-----------------------------|-----------|

| | |
|--|-----------|
| 5.0 SERIAL ATA (SATA) INTERFACE | 22 |
| 5.1 HOT-PLUG COMPATIBILITY | 22 |
| 5.2 SERIAL ATA DEVICE PLUG CONNECTOR PIN DEFINITIONS | 22 |
| 5.3 SUPPORTED ATA COMMANDS | 23 |
| 5.3.1 Identify Device command | 25 |
| 5.3.2 Set Features command | 29 |
| 5.3.3 S.M.A.R.T. commands | 30 |

| | | |
|-----------|--|----|
| Figure 1. | Typical +5V only startup and operation current profile | 9 |
| Figure 2. | Serial ATA connectors | 17 |
| Figure 3. | Attaching SATA cabling | 18 |
| Figure 4. | Mounting dimensions (for FIPS 140-2 models) — top, side and end view | 19 |
| Figure 5. | Mounting dimensions (for standard models) — top, side and end view | 20 |
| Figure 6. | Example of FIPS tamper evidence labels. | 21 |

Seagate Technology Support Services

For information regarding online support and services, visit http://www.seagate.com/www/en-us/about/contact_us/

Available services include:

- Presales & Technical support
- Global Support Services telephone numbers & business hours
- Authorized Service Centers

For information regarding Warranty Support, visit <http://www.seagate.com/support/warranty-and-returns>

For information regarding data recovery services, visit <http://www.seagate.com/services-software/data-recovery-services/>

For Seagate OEM and Distribution partner portal, visit <https://direct.seagate.com/portal/system>

For Seagate reseller portal, visit <http://spp.seagate.com>

1.0 INTRODUCTION

This manual describes the functional, mechanical and interface specifications for the following Seagate Momentus® Thin model drives:

| ST MODEL # | PART # | ST MODEL # | PART # | ST MODEL # | PART # |
|-----------------|--------|---------------------|--------|-------------------------|--------|
| Standard models | | Standard SED models | | SED (FIPS 140-2) models | |
| ST320LT007 | 9ZV142 | ST320LT014 | 9YK142 | ST320LT009 | 9WC142 |
| ST250LT007 | 9ZV14C | ST250LT014 | 9YK14C | ST250LT009 | 9WC14C |
| ST160LT007 | 9ZV14D | ST160LT014 | 9YK14D | ST160LT009 | 9WC14D |

NOTE

Previous generations of Seagate Self-Encrypting Drive models were called Full Disk Encryption (FDE) models before a differentiation between drive-based encryption and other forms of encryption was necessary.

NOTE

The Self-Encrypting Drive models indicated on the cover of this product manual have provisions for "Security of Data at Rest" based on the standards defined by the Trusted Computing Group (see www.trustedcomputinggroup.org).

For more information on FIPS 140-2 Level 2 certification see Section 4.0 on page 21.

These drives provide the following key features:

- 7200-RPM spindle speed.
- 16-MB buffer.
- Quiet operation. Fluid Dynamic Bearing (FDB) motor.
- High instantaneous (burst) data-transfer rates (up to 3Gb/s).
- Perpendicular recording technology.
- State-of-the-art cache and on-the-fly error-correction algorithms.
- Native Command Queuing (NCQ) with command ordering.
- Full-track multiple-sector transfer capability without local processor intervention.
- 1000 Gs nonoperating shock and 350 Gs of operating shock.
- SeaTools diagnostic software performs a drive self-test that eliminates unnecessary drive returns.
- The 3D Defense System™, which includes Drive Defense, Data Defense and Diagnostic Defense, offers the industry's most comprehensive protection for disk drives.
- Support for S.M.A.R.T. drive monitoring and reporting.
- Support for Read Multiple and Write Multiple commands.

Momentum Thin Self-Encrypting Drive models have the following additional features:

- Automatic data encryption/decryption
- Controlled access
- Random number generator
- Drive locking
- 16 independent data bands
- Cryptographic erase of user data for a drive that will be repurposed or scrapped
- Authenticated firmware download

NOTE

There is no significant performance difference between Self-Encrypting Drive and standard (non-Self-Encrypting Drive) models.

1.1 ABOUT THE SERIAL ATA INTERFACE

The Serial ATA interface provides several advantages over the traditional (parallel) ATA interface. The primary advantages include:

- Easy installation and configuration with true plug-and-play connectivity. It is not normally necessary to set any jumpers or other configuration options.
- Thinner and more flexible cabling for improved enclosure airflow and ease of installation.
- Scalability to higher performance levels.

In addition, Serial ATA makes the transition from parallel ATA easy by providing legacy software support. Serial ATA was designed to allow you to install a Serial ATA host adapter and Serial ATA disk drive in your current system and expect all of your existing applications to work as normal.

The Serial ATA interface connects each disk drive in a point-to-point configuration with the Serial ATA host adapter. There is no master/slave relationship with Serial ATA devices like there is with parallel ATA. If two drives are attached on one Serial ATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. This essentially means both drives behave as if they are Device 0 (master) devices.

NOTE

The host adapter may, optionally, emulate a master/slave environment to host software where two devices on separate Serial ATA ports are represented to host software as a Device 0 (master) and Device 1 (slave) accessed at the same set of host bus addresses. A host adapter that emulates a master/slave environment manages two sets of shadow registers. This is not a typical Serial ATA environment.

The Serial ATA host adapter and drive share the function of emulating parallel ATA device behavior to provide backward compatibility with existing host systems and software. The Command and Control Block registers, PIO and DMA data transfers, resets, and interrupts are all emulated.

The Serial ATA host adapter contains a set of registers that shadow the contents of the traditional device registers, referred to as the Shadow Register Block. All Serial ATA devices behave like Device 0 devices. For additional information about how Serial ATA emulates parallel ATA, refer to the “Serial ATA: High Speed Serialized AT Attachment” specification. The specification can be downloaded from <http://www.serialata.org>.

2.0 DRIVE SPECIFICATIONS

Unless otherwise noted, all specifications are measured under ambient conditions, at 25°C, and nominal power. For convenience, the phrases *the drive* and *this drive* are used throughout this manual to indicate all models.

2.1 SPECIFICATION SUMMARY TABLE

The specifications listed in this table are for quick reference. For details on specification measurement or definition, see the appropriate section of this manual

Table 1 Drive specifications

| Drive specification | ST320LT007 - 9ZV142 ST320LT009 - 9WC142 ST320LT014 - 9YK142 | ST250LT007 - 9ZV14C ST250LT009 - 9WC14C ST250LT014 - 9YK14C | ST160LT007 - 9ZV14D ST160LT009 - 9WC14D ST160LT014 - 9YK14D |
|--|--|---|---|
| Formatted capacity (GB)* | 320 | 250 | 160 |
| Guaranteed logical blocks (LBA) | 625,142,448 | 488,397,168 | 312,581,808 |
| Bytes per physical sector | 4096 | | |
| Physical read/write heads | 2 | | 1 |
| Disks | 1 | | |
| Cache (MB) | 16 | | |
| Recording density in BPI (bits/in avg) | 1397k | | |
| Track density TPI (tracks/in avg) | 315k | | |
| Areal density (Gb/in ² avg) | 425 | | |
| Spindle speed (RPM) | 7200 | | |
| Average latency (ms) | 4.17 | | |
| Internal transfer rate (Mb/s max) | 1247 | | |
| I/O data transfer rate (Gb/s max) | 3.0 | | |
| ATA data-transfer modes supported | SATA 1.0, Serial ATA Revision 2.6 PIO modes 0–4 Multiword DMA modes 0–2 Ultra DMA modes 0–6 | | |
| Height (max) | 7.0 mm (0.276 in) | | |
| Width (max) | 70.10 mm (2.76 in) | | |
| Length (max) | 100.55 mm (3.959 in) | | |
| Weight (max) | <92.0 g (<0.203 lb) | | |
| Power-on to ready (sec typical) | 3.5 | | |
| Standby to ready (sec typical) | 3.0 | | |
| Track-to-track seek time, read (ms typical) | 1.5 | | |
| Average seek, read (ms typical) | 11 | | |
| Startup current, +5V (max) | 1.0A | | |
| Read/write power (typical) | Read: 1.6W; Write: 1.9W | | |
| Idle mode, low power (typical) | 0.66W | | |
| Standby/Sleep mode (typical) | 0.15W *** | | |
| Voltage tolerance (including noise) | +5V ± 10% | | |
| Ambient temperature | 0° to 60°C (operating), –40° to 70°C (nonoperating) | | |
| Temperature gradient (°C per hour max) | 20°C (operating) 35°C (nonoperating) | | |
| Relative humidity | 5% to 95% (operating) 5% to 95% (nonoperating) | | |
| Relative humidity gradient | 30% per hour max | | |
| Wet bulb temperature (°C max) | 37.7 (operating) 40 (nonoperating) | | |
| Altitude, operating | –304.8 m to 3,048 m (–1000 ft. to 10,000+ ft.) | | |
| Altitude, nonoperating (meters below mean sea level, max) | –304.8 m to 12,192 m (–1000 ft. to 40,000+ ft.) | | |

Table 1 Drive specifications

| Drive specification | ST320LT007 - 9ZV142 ST320LT009 - 9WC142 ST320LT014 - 9YK142 | ST250LT007 - 9ZV14C ST250LT009 - 9WC14C ST250LT014 - 9YK14C | ST160LT007 - 9ZV14D ST160LT009 - 9WC14D ST160LT014 - 9YK14D |
|--|--|---|---|
| Shock, operating (Gs max at 2ms) | 350 | | |
| Shock, nonoperating (Gs max at 2ms) | 800 | | |
| Shock, nonoperating (Gs max at 1ms) | 1000 | | |
| Shock, nonoperating (Gs max at 0.5ms) | 600 | | |
| Vibration, operating (Swept Sine) | 1.0 Gs (0 to peak, 5–500 Hz) | | |
| Vibration, nonoperating | 5.0 Gs (0 to peak, 5–500 Hz) | | |
| Drive acoustics, sound power (bels) | | | |
| Idle** | 2.3 (typical) 2.5 (max) | | |
| Seek | 2.5 (typical) 2.7 (max) | | |
| Nonrecoverable read errors | 1 per 10 ¹⁴ bits read | | |
| Annualized Failure Rate (AFR) | 0.48% | | |
| Load/Unload (U/UL) cycles | | | |
| 25°C, 50% relative humidity | 600,000 software-controlled power on/off cycles 20,000 hard power on/off cycles | | |
| 32°C, 80% relative humidity | 600,000 software-controlled power on/off cycles | | |
| 5°C, 80% relative humidity | 20,000 hard power on/off cycles | | |
| 5°C, 10% relative humidity | | | |
| 55°C, 16% relative humidity | | | |
| Warranty | To determine the warranty for a specific drive, use a web browser to access the following web page: http://www.seagate.com/www/en-us/support/warranty_&_returns_assistance . You will be asked to provide the drive serial number, model number (or part number) and country of purchase. After submitting this information, the system will display the warranty information for your drive. | | |
| Supports Hotplug operation per Serial ATA Revision 2.6 specification | Yes (requires COMRESET from host after a hotplug event) | | |

*One GB equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

**During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

***Typical notebooks will pull power to the drive when entering S3 and S4; while in the S3 and S4 states, drive sleep and drive standby modes will not contribute to battery power consumption.

2.2 FORMATTED CAPACITY

| Formatted capacity* | Guaranteed logical blocks (LBA) - 512 emulation | Bytes per physical sector |
|---|---|---------------------------|
| ST320LT007 - 9ZV142 ST320LT009 - 9WC142 ST320LT014 - 9YK142 | 625,142,448 | 4096 |
| ST250LT007 - 9ZV14C ST250LT009 - 9WC14C ST250LT014 - 9YK14C | 488,397,168 | |
| ST160LT007 - 9ZV14D ST160LT009 - 9WC14D ST160LT014 - 9YK14D | 312,581,808 | |

*One GB equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

2.2.1 LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to $n-1$, where n is the number of guaranteed logical blocks (LBA) as defined above.

See Section 5.3.1, "Identify Device command" (words 60-61 and 100-103) for additional information about 48-bit addressing support of drives with capacities over 137GB.

2.3 DEFAULT LOGICAL GEOMETRY

| CYLINDERS | READ/WRITE HEADS | SECTORS PER TRACK |
|-----------|------------------|-------------------|
| 16,383 | 16 | 63 |

LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to $n-1$, where n is the number of guaranteed logical blocks (LBA) as defined above.

2.4 PHYSICAL ORGANIZATION

| Models | READ/WRITE HEADS | NUMBER OF DISKS |
|--------------|------------------|-----------------|
| 320GB models | 2 | 1 |
| 250GB models | | |
| 160GB models | 1 | |

2.5 RECORDING AND INTERFACE TECHNOLOGY

| | 4K SECTOR MODELS |
|--|-------------------|
| Interface | Serial ATA (SATA) |
| Recording method | Perpendicular |
| Recording density BPI (bits/in avg) | 1397k |
| Track density TPI (tracks/in avg) | 315k |
| Areal density (Gb/in ² avg) | 425 |
| Spindle speed (RPM) (± 0.2%) | 7200 |
| Maximum Internal transfer rate (Mb/s) | 1247 |
| I/O data-transfer rate (Gb/s max) | 3.0 |
| Interleave | 1:1 |
| Cache buffer | 16 MB (16,384 KB) |

2.6 PHYSICAL CHARACTERISTICS

| DRIVE SPECIFICATION | | |
|---------------------|--------------|---|
| Height | (mm) (in) | 6.8 +/-0.2 0.268 +/-0.0079 |
| Width | (mm) (in) | 69.85 +/-0.25 2.75 +/-0.0098 |
| Length | (mm) (in) | 100.35 +0.20/-0.25 3.951 +0.008/-0.010 |
| Weight (max) | | |
| All models | | 92.0 g 0.203 lb |

2.7 SEEK TIME

Seek measurements are taken with nominal power at 25°C ambient temperature. All times are measured using drive diagnostics. The specifications in the table below are defined as follows:

- Track-to-track seek time is an average of all possible single-track seeks in both directions.
- Average seek time is a true statistical random average of at least 5000 measurements of seeks between random tracks, less overhead.

Table 2 Typical seek times

| TYPICAL SEEK TIMES (MS) | READ |
|-------------------------|------|
| Track-to-track | 1.5 |
| Average | 11 |
| Average latency | 4.17 |

NOTE

These drives are designed to consistently meet the seek times represented in this manual. Physical seeks, regardless of mode (such as track-to-track and average), are expected to meet the noted values. However, due to the manner in which these drives are formatted, benchmark tests that include command overhead or measure logical seeks may produce results that vary from these specifications.

2.8 START/STOP TIMES

| TIME TO READY | TYPICAL | MAX @ 25°C |
|-------------------------|---------|------------|
| Power-on to Ready (sec) | 3.5 | 4.0 |
| Standby to Ready (sec) | 3.0 | 3.0 |

2.9 POWER SPECIFICATIONS

The drive receives DC power (+5V) through a native SATA power connector.

2.9.1 Power consumption

Power requirements for the drives are listed in the table on page 8. Typical power measurements are based on an average of drives tested, under nominal conditions, at 25°C ambient temperature. These power measurements are done with Interface Power Management modes like HIPM and DIPM enabled.

- **Spinup power**

Spinup power is measured from the time of power-on to the time that the drive spindle reaches operating speed.

- **Seek mode**

During seek mode, the read/write actuator arm moves toward a specific position on the disk surface and does not execute a read or write operation. Servo electronics are active. Seek mode power is measured based on three random seek operations every 100ms. This mode is not typical.

- **Read/write power and current**

Read/write power is measured with the heads on track, based on three 63 sector read or write operations every 100ms.

- **Idle mode power**

Idle mode power is measured with the drive up to speed, with servo electronics active and with the heads in a random track location.

- **Standby mode**

During Standby mode, the drive accepts commands, but the drive is not spinning, and the servo and read/write electronics are in power-down model

Table 3 DC power

| POWER DISSIPATION | +5V INPUT AVERAGE (25° C) |
|-----------------------|---------------------------|
| Spinup (max) | 1.00A |
| Seek | 1.6W |
| Read | 1.6W |
| Write | 1.9W |
| Idle, performance* | 1.3W |
| Idle, active* | 0.90W |
| Idle, low power mode* | 0.66W |
| Standby** | 0.15W |
| Sleep | 0.15W |

*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.


**Standby power is measured at steady state (after 200ms from transition)

2.9.1.1 Typical current profile

5-May-10

17:36:39

1: 5 s
200mV

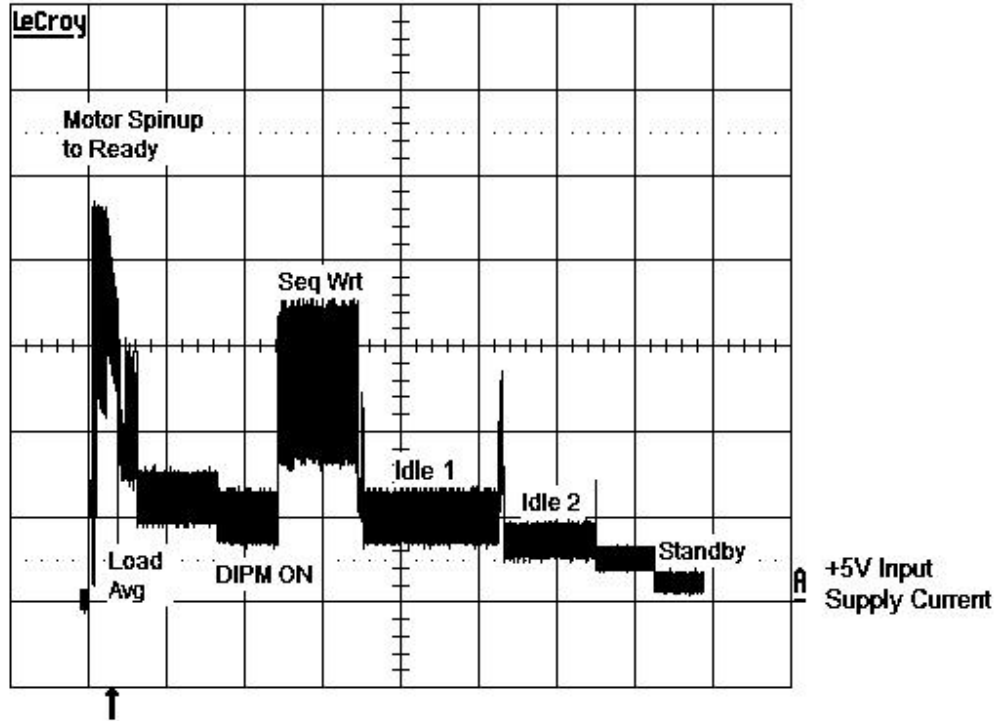

5 s

1 .2 V DC
2 .2 V DC
3 .2 V DC $\times 10$
4 .2 V DC $\times 10$



1 DC 0.520 V

100 kS/s

STOPPED

Figure 1. Typical +5V only startup and operation current profile

2.9.2 Deferred spinup

Momentum Thin drives do not support the deferred spinup option. If you require this option, refer to the Momentum 5400.3 SATA Blade Server family of drives.

2.9.3 Conducted noise

Input noise ripple is measured at the host system power supply across an equivalent 15-ohm resistive load on the +5 volt line.

Using 5-volt power, the drive is expected to operate with a maximum of 100 mV peak-to-peak square-wave injected noise at up to 10 MHz.

NOTE Equivalent resistance is calculated by dividing the nominal voltage by the typical RMS read/write current.

2.9.4 Voltage tolerance

Voltage tolerance (including noise):

5V \pm 10%

2.9.5 Power-management modes

The drive provides programmable power management to provide greater energy efficiency. In most systems, you can control power management through the system setup program. The drive features the following power-management modes:

Table 4 Power management modes

| POWER MODES | HEADS | SPINDLE | BUFFER |
|--------------------|--------------|----------------|------------------------|
| Active (operating) | Tracking | Rotating | Full power |
| Idle, performance | Tracking | Rotating | Self refresh—low power |
| Idle, active | Floating | Rotating | Self refresh—low power |
| Idle, low power | Parked | Rotating | Self refresh—low power |
| Standby | Parked | Stopped | Self refresh—low power |
| Sleep | Parked | Stopped | Self refresh—low power |

- **Active mode**

The drive is in Active mode during the read/write and seek operations.

- **Idle mode**

The buffer remains enabled, and the drive accepts all commands and returns to Active mode any time disk access is necessary.

- **Standby mode**

The drive enters Standby mode when the host sends a Standby Immediate command. If the host has set the standby timer, the drive can also enter Standby mode automatically after the drive has been inactive for a specifiable length of time. The standby timer delay is established using a Standby or Idle command. In Standby mode, the drive buffer is in Self Refresh Low Power mode, the heads are parked and the spindle is at rest. The drive accepts all commands and returns to Active mode any time disk access is necessary.

- **Sleep mode**

The drive enters Sleep mode after receiving a Sleep command from the host. In Sleep mode, the drive buffer is in Self Refresh Low Power mode, the heads are parked and the spindle is at rest. The drive leaves Sleep mode after it receives a Hard Reset or Soft Reset from the host. After receiving a reset, the drive exits Sleep mode and enters Standby mode with all current translation parameters intact.

- **Idle and Standby timers**

Each time the drive performs an Active function (read, write or seek), the standby timer is reinitialized and begins counting down from its specified delay times to zero. If the standby timer reaches zero before any drive activity is required, the drive makes a transition to Standby mode. In both Idle and Standby mode, the drive accepts all commands and returns to Active mode when disk access is necessary.

2.10 ENVIRONMENTAL SPECIFICATIONS

2.10.1 Ambient temperature

Ambient temperature is defined as the temperature of the environment immediately surrounding the drive.

Above 1000 feet (305 meters), the maximum temperature is derated linearly by 1°C every 1000 feet.

| | |
|---------------|------------------------------|
| Operating: | 0° to 60°C (32° to 140°F) |
| Nonoperating: | −40° to 70°C (−40° to 158°F) |

2.10.2 Temperature gradient

| | |
|--------------|---|
| Operating | 20°C per hour (68°F per hour max), without condensation |
| Nonoperating | 35°C per hour (95°F per hour max), without condensation |

| | |
|-------------|---|
| NOTE | The recommended storage period: |
| | <ul style="list-style-type: none">• 1 year under controlled conditions of 34°C 90%RH or less• 90 days in uncontrolled storage conditions |

2.10.3 Humidity

2.10.3.1 Relative humidity

| | |
|--------------|--|
| Operating | 5% to 95% noncondensing (30% per hour max) |
| Nonoperating | 5% to 95% noncondensing (30% per hour max) |

2.10.3.2 Wet bulb temperature

| | |
|--------------|----------------------|
| Operating | 37.7°C (99.86°F max) |
| Nonoperating | 40°C (104°F max) |

2.10.4 Altitude

| | |
|--------------|---|
| Operating | −304.8 m to 3,048 m (−1000 ft to 10,000+ ft) |
| Nonoperating | −304.8 m to 12,192 m (−1000 ft to 40,000+ ft) |

2.10.5 Shock

All shock specifications assume that the drive is mounted securely with the input shock applied at the drive mounting screws. Shock may be applied in the X, Y or Z axis.

2.10.5.1 Operating shock

These drives comply with the performance levels specified in this document when subjected to a maximum operating shock of 350 Gs based on half-sine shock pulses of 2ms. Shocks should not be repeated more than two times per second.

2.10.5.2 Nonoperating shock

The nonoperating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 800 Gs based on a nonrepetitive half-sine shock pulse of 2ms duration.

The nonoperating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 1000 Gs based on a nonrepetitive half-sine shock pulse of 1ms duration.

The nonoperating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 600 Gs based on a nonrepetitive half-sine shock pulse of 0.5ms duration.

2.10.6 Vibration

All vibration specifications assume that the drive is mounted securely with the input vibration applied at the drive mounting screws. Vibration may be applied in the X, Y or Z axis.

2.10.6.1 Operating vibration

The maximum vibration levels that the drive may experience while meeting the performance standards specified in this document are specified below.

| | |
|----------|--|
| 5–500 Hz | 1.0 Gs (0 to peak). Max displacement may apply below 10Hz. |
|----------|--|

2.10.6.2 Nonoperating vibration

The maximum nonoperating vibration levels that the drive may experience without incurring physical damage or degradation in performance when subsequently put into operation are specified below.

| | |
|-----------|--|
| 5–500 Hz: | 5.0 Gs (0 to peak). Max displacement may apply below 22Hz. |
|-----------|--|

2.11 ACOUSTICS

Drive emission of sound is measured consistent with the ECMA-74 and its' referenced standards. Testing is conducted at room temperature (approximately 25°C). Emission levels are reported as the total A-weighted sound power levels for steady state, idle, and active seek modes of operation.

Table 5 Drive A-weighted Sound Power Levels (SWL, BA)

| IDLE* | PERFORMANCE SEEK |
|----------------------------------|----------------------------------|
| 2.3 bels (typ) 2.5 bels (max) | 2.5 bels (typ) 2.7 bels (max) |

*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

Test for Prominent Discrete Tones (PDTs)

Seagate follows the ECMA-74 standards for measurement and identification of PDTs. An exception to this process is the use of the absolute threshold of hearing. Seagate uses the lower limit for the threshold curve* to discern tone audibility and to compensate for the inaudible components of sound prior to computation of tone ratios according to Annex D of the ECMA-74 standards.

*Defined as the median curve given by ISO 389-7 (Tf curve) minus 10dB at all frequencies.

2.12 ELECTROMAGNETIC IMMUNITY

When properly installed in a representative host system, the drive operates without errors or degradation in performance when subjected to the radio frequency (RF) environments defined in the following table:

Table 6 Radio frequency environments

| TEST | DESCRIPTION | PERFORMANCE LEVEL | REFERENCE STANDARD |
|----------------------------------|---|-------------------|-----------------------------------|
| Electrostatic discharge | Contact, HCP, VCP: ± 4 kV; Air: ± 8 kV | B | EN 61000-4-2: 95 |
| Radiated RF immunity | 80 to 2000 MHz, 10 V/m, 80% AM with 1 kHz sine 900 MHz, 3 V/m, 50% pulse modulation @ 200 Hz | A | EN 61000-4-3: 96 ENV 50204: 95 |
| Electrical fast transient | ± 1 kV on AC mains, ± 0.5 kV on external I/O | B | EN 61000-4-4: 95 |
| Surge immunity | ± 1 kV differential, ± 2 kV common, AC mains | B | EN 61000-4-5: 95 |
| Conducted RF immunity | 150 kHz to 80 MHz, 3 Vrms, 80% AM with 1 kHz sine | A | EN 61000-4-6: 97 |
| Power Frequency H-field immunity | 1 A/m, 50Hz/60Hz, 3 axes | A | EN 61000-4-8: 97 |
| Voltage dips, interrupts | 30% Reduction for 25 cycles >95% Reduction for 250 cycles >95%, 0.5 cycles | C C B | EN 61000-4-11: 94 |

2.13 RELIABILITY

| MEASUREMENT TYPE | SPECIFICATION |
|---|--|
| Nonrecoverable read errors | 1 per 10 ¹⁴ bits read, max |
| Annualized Failure Rate (AFR) | <0.48% |
| Load/Unload (U/UL) 25°C, 50% relative humidity 32°C, 80% relative humidity 5°C, 80% relative humidity 5°C, 10% relative humidity 55°C, 16% relative humidity | 600,000 software-controlled power on/off cycles 20,000 hard power on/off cycles 600,000 software-controlled power on/off cycles 20,000 hard power on/off cycles |
| Warranty | To determine the warranty for a specific drive, use a web browser to access the following web page: http://www.seagate.com/www/en-us/support/warranty_&_returns_assistance You will be asked to provide the drive serial number, model number (or part number) and country of purchase. After submitting this information, the system will display the warranty information for your drive. |

2.14 AGENCY CERTIFICATION

2.14.1 Safety certification

These products are certified to meet the requirements of UL60950-1, CSA60950-1 and EN60950 and so marked as to the certify agency.

2.14.2 Electromagnetic compatibility

Hard drives that display the CE mark comply with the European Union (EU) requirements specified in the Electromagnetic Compatibility Directive (2004/108/EC) as put into place 20 July 2007. Testing is performed to the levels specified by the product standards for Information Technology Equipment (ITE). Emission levels are defined by EN 55022, Class B and the immunity levels are defined by EN 55024.

Drives are tested in representative end-user systems. Although CE-marked Seagate drives comply with the directives when used in the test systems, we cannot guarantee that all systems will comply with the directives. The drive is designed for operation inside a properly designed enclosure, with properly shielded I/O cable (if necessary) and terminators on all unused I/O ports. Computer manufacturers and system integrators should confirm EMC compliance and provide CE marking for their products.

Korean RRL

If these drives have the Korean Communications Commission (KCC) logo, they comply with paragraph 1 of Article 11 of the Electromagnetic Compatibility control Regulation and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Radio Research Laboratory (RRL) Communications Commission, Republic of Korea.

These drives have been tested and comply with the Electromagnetic Interference/Electromagnetic Susceptibility (EMI/EMS) for Class B products. Drives are tested in a representative, end-user system by a Korean-recognized lab.

- Certificate number:STX-MomentusThin (B)
- Trade name or applicant:Seagate Technology LLC
- Certificate date: May 14, 2010
- Manufacturer/nationality:USA, Singapore and China

Australian C-Tick (N176)

If these models have the C-Tick marking, they comply with the Australia/New Zealand Standard AS/NZ CISPR22 and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Australian Communication Authority (ACA).

2.14.3 FCC verification

These drives are intended to be contained solely within a personal computer or similar enclosure (not attached as an external device). As such, each drive is considered to be a subassembly even when it is individually marketed to the customer. As a subassembly, no Federal Communications Commission verification or certification of the device is required.

Seagate Technology LLC has tested this device in enclosures as described above to ensure that the total assembly (enclosure, disk drive, motherboard, power supply, etc.) does comply with the limits for a Class B computing device, pursuant to Subpart J, Part 15 of the FCC rules. Operation with noncertified assemblies is likely to result in interference to radio and television reception.

Radio and television interference. This equipment generates and uses radio frequency energy and if not installed and used in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception.

This equipment is designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television, which can be determined by turning the equipment on and off, you are encouraged to try one or more of the following corrective measures:

- Reorient the receiving antenna.
- Move the device to one side or the other of the radio or TV.
- Move the device farther away from the radio or TV.
- Plug the computer into a different outlet so that the receiver and computer are on different branch outlets.

If necessary, you should consult your dealer or an experienced radio/television technician for additional suggestions. You may find helpful the following booklet prepared by the Federal Communications Commission: *How to Identify and Resolve Radio-Television Interference Problems*. This booklet is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Refer to publication number 004-000-00345-4.

2.15 ENVIRONMENTAL PROTECTION

Seagate designs its products to meet environmental protection requirements worldwide, including regulations restricting certain chemical substances.

2.15.1 European Union Restriction of Hazardous Substances (RoHS)

The European Union Restriction of Hazardous Substances (RoHS) Directive, restricts the presence of chemical substances, including Lead, Cadmium, Mercury, Hexavalent Chromium, PBB and PBDE, in electronic products, effective July 2006. This drive is manufactured with components and materials that comply with the RoHS Directive.

2.15.2 China Restriction of Hazardous Substances (RoHS) Directive 中国限制危险物品的指令

This product has an Environmental Protection Use Period (EPUP) of 20 years. The following table contains information mandated by China's "Marking Requirements for Control of Pollution Caused by Electronic Information Products" Standard.



该产品具有20年的环境保护使用周期（EPUP）。下表包含了中国“电子产品所导致的污染的控制的记号要求”所指定的信息。

| Name of Parts 部件名称 | Toxic or Hazardous Substances or Elements有毒有害物质或元素 | | | | | |
|-----------------------|--|----------------------|----------------------|---|---|---|
| | Lead 铅 (Pb) | Mercury 汞 (Hg) | Cadmium 镉 (Cd) | Hexavalent Chromium 六价铬 (Cr6+) | Polybrominated Biphenyl 多溴联苯 (PBB) | Polybrominated Diphenyl Ether 多溴二苯醚 (PBDE) |
| PCBA | X | O | O | O | O | O |
| HDA | X | O | O | O | O | O |

"O" indicates the hazardous and toxic substance content of the part (at the homogenous material level) is lower than the threshold defined by the China RoHS MCV Standard.

“O”表示该部件（于同类物品程度上）所含的危险和有毒物质低于中国RoHS MCV标准所定义的门槛值。

"X" indicates the hazardous and toxic substance content of the part (at the homogenous material level) is over the threshold defined by the China RoHS MCV Standard.

“X”表示该部件（于同类物品程度上）所含的危险和有毒物质超出中国RoHS MCV标准所定义的门槛值。

2.16 CORROSIVE ENVIRONMENT

Seagate electronic drive components pass accelerated corrosion testing equivalent to 10 years exposure to light industrial environments containing sulfurous gases, chlorine and nitric oxide, classes G and H per ASTM B845. However, this accelerated testing cannot duplicate every potential application environment.

Users should use caution exposing any electronic components to uncontrolled chemical pollutants and corrosive chemicals as electronic drive component reliability can be affected by the installation environment. The silver, copper, nickel and gold films used in Seagate products are especially sensitive to the presence of sulfide, chloride, and nitrate contaminants. Sulfur is found to be the most damaging. In addition, electronic components should never be exposed to condensing water on the surface of the printed circuit board assembly (PCBA) or exposed to an ambient relative humidity greater than 95%. Materials used in cabinet fabrication, such as vulcanized rubber, that can outgas corrosive compounds should be minimized or eliminated. The useful life of any electronic equipment may be extended by replacing materials near circuitry with sulfide-free alternatives.

3.0 CONFIGURING AND MOUNTING THE DRIVE

This section contains the specifications and instructions for configuring and mounting the drive.

3.1 HANDLING AND STATIC-DISCHARGE PRECAUTIONS

After unpacking, and before installation, the drive may be exposed to potential handling and electrostatic discharge (ESD) hazards. Observe the following standard handling and static-discharge precautions:

| | |
|----------------|--|
| CAUTION | • Keep the drive in the electrostatic discharge (ESD) bag until you are ready for installation to limit the drive's exposure to ESD. |
| | • Before handling the drive, put on a grounded wrist strap, or ground yourself frequently by touching the metal chassis of a computer that is plugged into a grounded outlet. Wear a grounded wrist strap throughout the entire installation procedure. |
| | • Handle the drive only by its edges or frame. |
| | • The drive is fragile—handle it with care. Do not press down on the drive top cover. |
| | • Always rest the drive on a padded, antistatic surface until you mount it in the computer. |
| | • Do not touch the connector pins or the printed circuit board. |
| | • Do not remove the factory-installed labels from the drive or cover them with additional labels. Removal voids the warranty. Some factory-installed labels contain information needed to service the drive. Other labels are used to seal out dirt and contamination. |

3.2 CONFIGURING THE DRIVE

Each drive on the Serial ATA interface connects in a point-to-point configuration with the Serial ATA host adapter. There is no master/slave relationship because each drive is considered a master in a point-to-point relationships. If two drives are attached on one Serial ATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. This means both drives behave as if they are Device 0 (master) devices.

Serial ATA drives are designed for easy installation. It is normally not necessary to set any jumpers on this drive for proper operation. If the host system does not support SATA 3Gb/s operation, place a jumper on pins 1 and 2 to limit the drive to 1.5Gb/s operation.

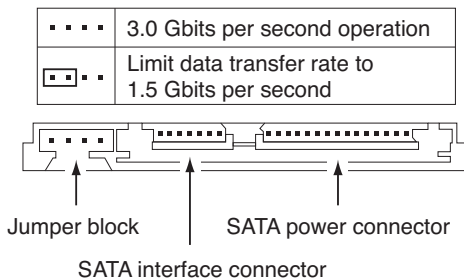


Figure 2. Serial ATA connectors

3.3 SERIAL ATA CABLES AND CONNECTORS

The Serial ATA interface cable consists of four conductors in two differential pairs, plus three ground connections. The cable size may be 30 to 26 AWG with a maximum length of one meter (39.37 inches). See [Table 7](#) for connector pin definitions. Either end of the SATA signal cable can be attached to the drive or host.

For direct backplane connection, the drive connectors are inserted directly into the host receptacle. The drive and the host receptacle incorporate features that enable the direct connection to be hot pluggable and blind mateable.

For installations which require cables, you can connect the drive as illustrated in Figure 3.

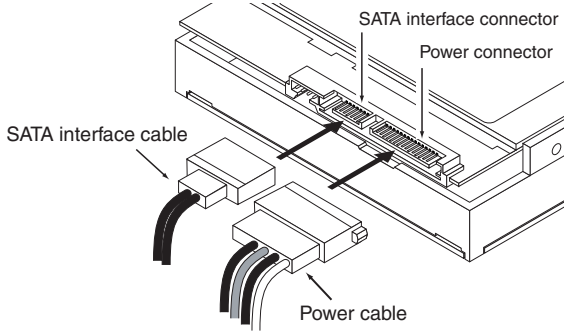


Figure 3. Attaching SATA cabling

Each connector is keyed to ensure correct orientation.

3.4 DRIVE MOUNTING

You can mount the drive using four screws in the side-mounting holes or four screws in the bottom-mounting holes. See [Figure 4](#) for drive mounting dimensions. Follow these important mounting precautions when mounting the drive:

- Allow a minimum clearance of 0.030 inches (0.76 mm) around the entire perimeter of the drive for cooling.
- Use only M3 x 0.5 mounting screws.
- Do not overtighten the mounting screws. Maximum torque: 4.0 in-lb (0.4519 N-m).
- Four (4) threads (0.080 inches, 2.032 mm) minimum screw engagement recommended.
- Avoid excessive drive distortion when mounting. Refer to the following specifications for stiffness/deflection information:

| TOP COVER STIFFNESS/DEFLECTION | |
|---|---|
| Operating with no performance degradation, emitted noise, mechanical damage, or hard errors | 10 mm probe: 1.02kgf or 5 mm probe: 0.92kgf |
| Non-operating with no hard errors | 20 mm probe: 2kgf at any point of top cover 20 mm probe: 15kgf at top cover edges only |

Measurements shown in Figures 4 and 5 are inches and (mm).

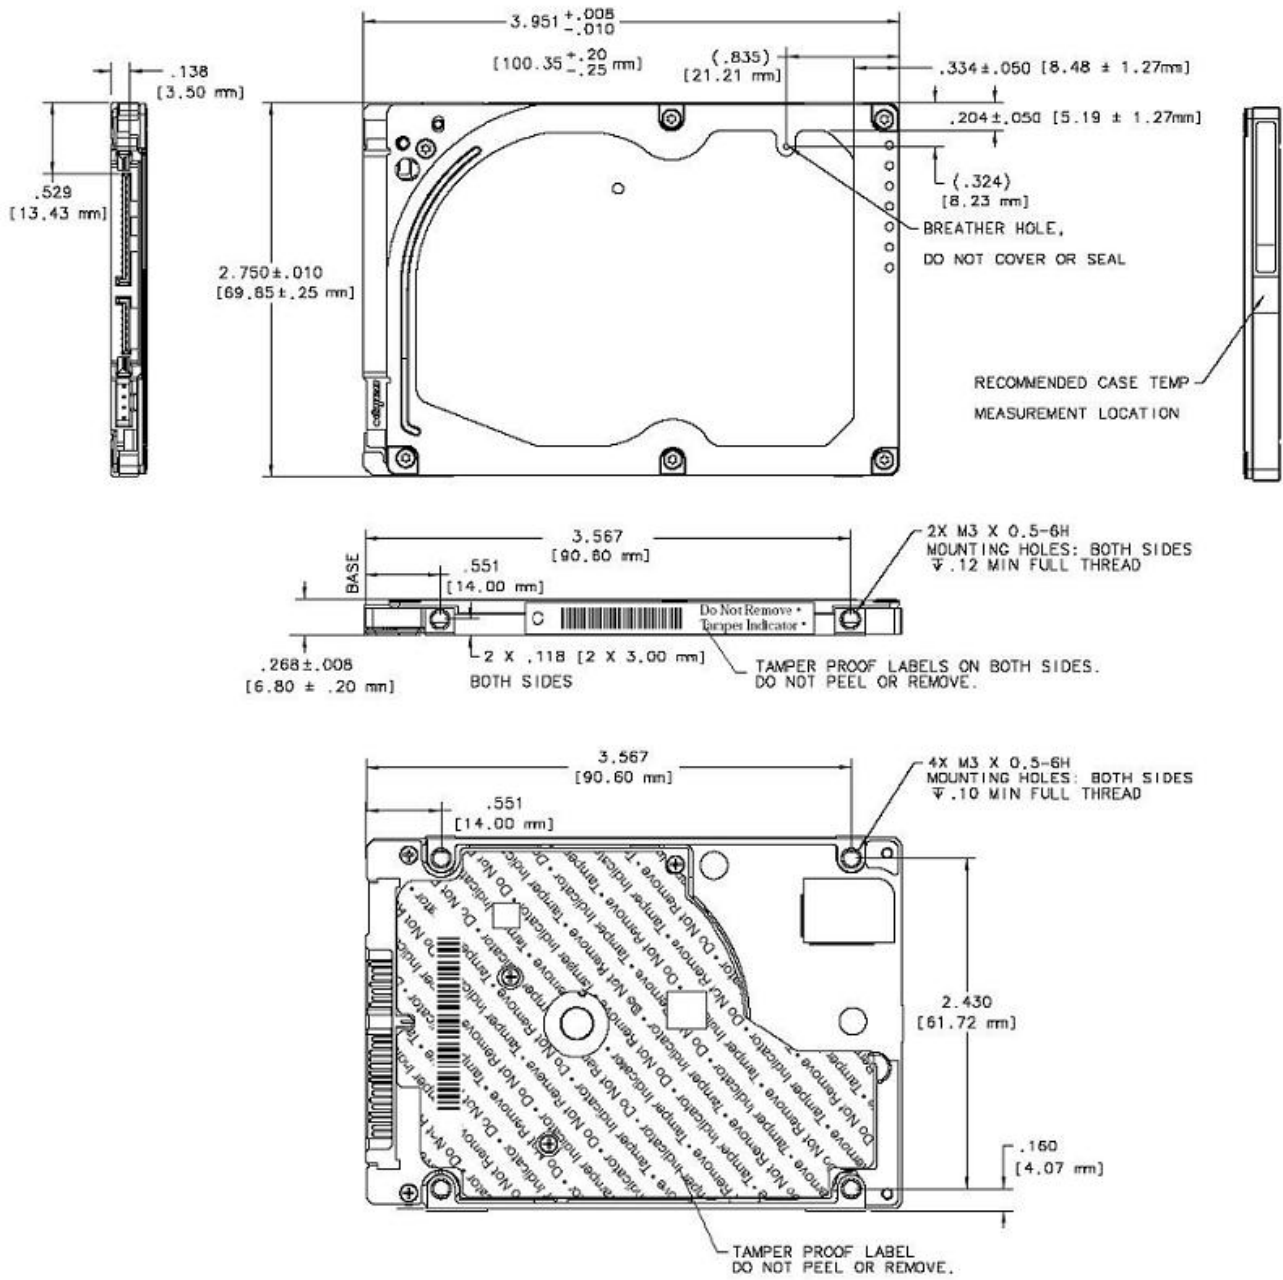


Figure 4. Mounting dimensions (for FIPS 140-2 models) — top, side and end view

WARNING

FIPS 140-2 Models Contain 3 Tamper Evident Stickers with the marking "Tamper Indicator - Do Not Remove". These stickers must remain attached to provide the tamper evidence throughout the life of the drive. Removing these stickers will indicate tampering and void the drive warranty.

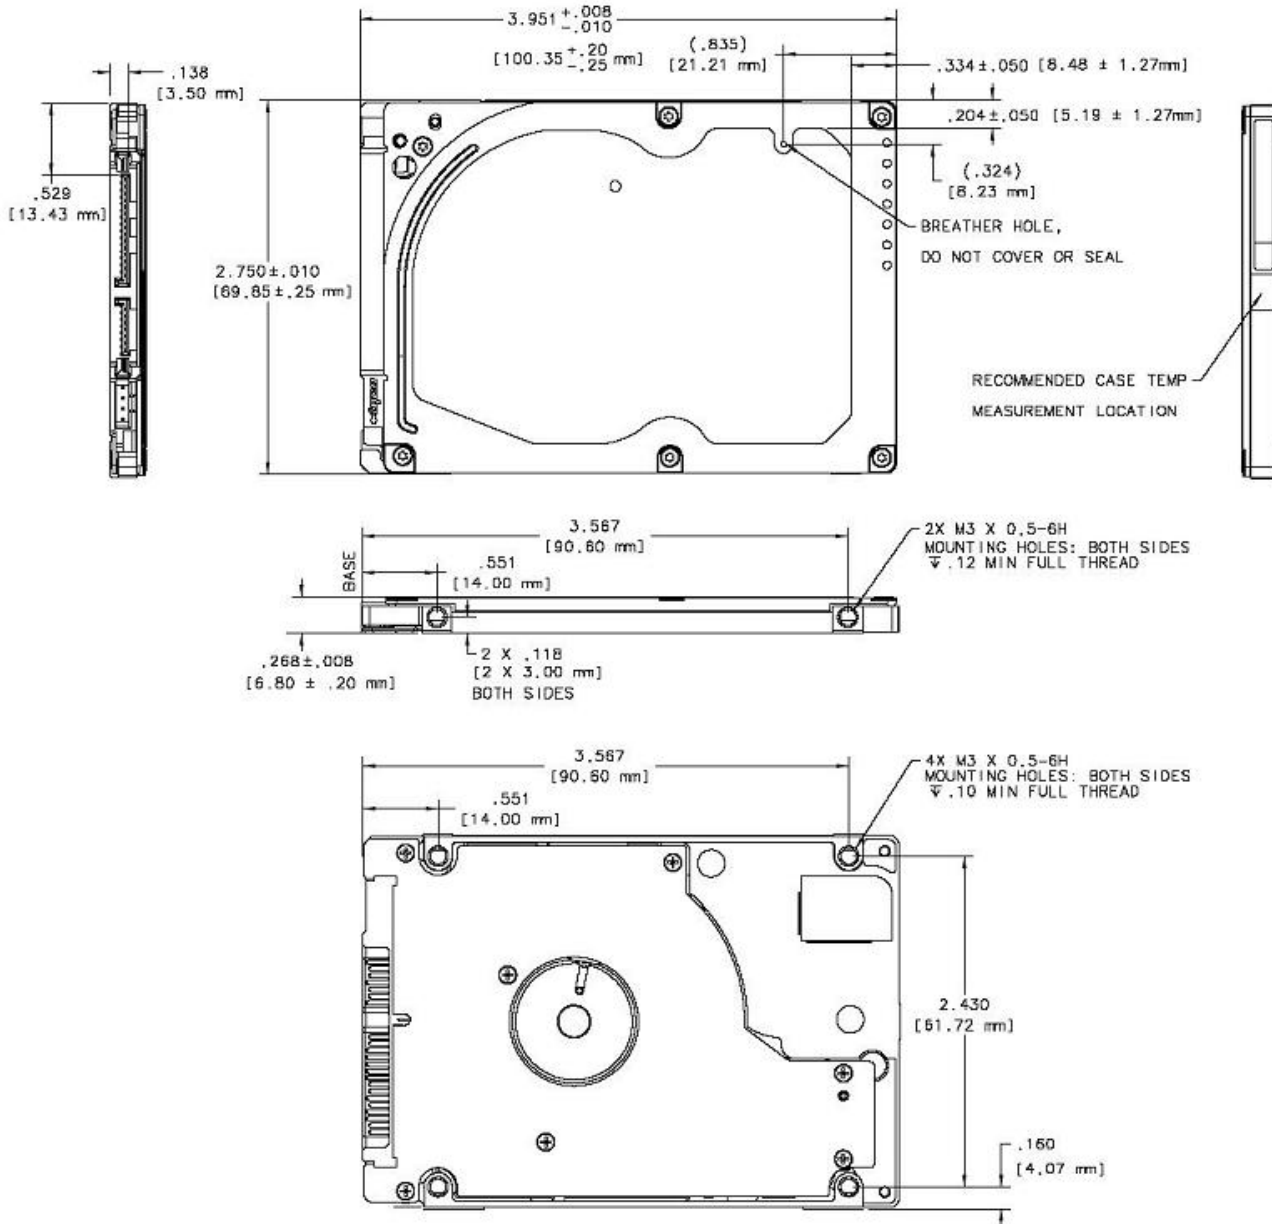


Figure 5. Mounting dimensions (for standard models) — top, side and end view

4.0 ABOUT FIPS

The Federal Information Processing Standard (FIPS) Publication 140-2, FIPS PUB 140-2, is a U.S. government computer security standard used to accredit cryptographic modules. It is titled “Security Requirements for Cryptographic Modules”. The initial publication was on May 25, 2001 and was last updated December 3, 2002.

Purpose

The National Institute of Standards and Technology (NIST) issued the FIPS 140 Publication Series to coordinate the requirements and standards for cryptography modules that include both hardware and software components.

Federal Information Processing Standard (FIPS) 140-2 Level 2 Certification requires drives to go through government agencies certifications to add requirements for physical tamper-evidence and role-based authentication.

Level 2 security

Level 2 improves upon the physical security mechanisms of a Level 1 (lowest level of security) cryptographic module by requiring features that show evidence of tampering, including tamper-evident coatings or seals that must be broken to attain physical access to the plaintext cryptographic keys and critical security parameters (CSPs) within the module, or pick-resistant locks on covers or doors to protect against unauthorized physical access.



Figure 6. Example of FIPS tamper evidence labels.

| | |
|-------------|---------------------------------|
| NOTE | May not represent actual drive. |
|-------------|---------------------------------|

5.0 SERIAL ATA (SATA) INTERFACE

These drives use the industry-standard Serial ATA interface that supports FIS data transfers. It supports ATA programmed input/output (PIO) modes 0–4; multiword DMA modes 0–2, and Ultra DMA modes 0–6. The drive also supports the use of the IORDY signal to provide reliable high-speed data transfers.

For detailed information about the Serial ATA interface, refer to the “Serial ATA: High Speed Serialized AT Attachment” specification.

5.1 HOT-PLUG COMPATIBILITY

Momentum Thin drives incorporate connectors which enable you to hot plug these drives in accordance with the Serial ATA: High Speed Serialized AT Attachment specification revision 2.0. This specification can be downloaded from <http://www.serialata.org>. This device requires a COMRESET from the host after a hotplug event.

5.2 SERIAL ATA DEVICE PLUG CONNECTOR PIN DEFINITIONS

Table 7 summarizes the signals on the Serial ATA interface and power connectors.

Table 7 Serial ATA connector pin definitions

| Segment | Pin | Function | Definition |
|---------------|-----|----------|-------------------------------------|
| Signal | S1 | Ground | 2nd mate |
| | S2 | A+ | Differential signal pair A from Phy |
| | S3 | A- | |
| | S4 | Ground | 2nd mate |
| | S5 | B- | Differential signal pair B from Phy |
| | S6 | B+ | |
| | S7 | Ground | 2nd mate |

Key and spacing separate signal and power segments

| Power | Pin | Function | Definition |
|--------------|-----|-----------------|---|
| Power | P1 | V ₃₃ | 3.3V power |
| | P2 | V ₃₃ | 3.3V power |
| | P3 | V ₃₃ | 3.3V power, pre-charge, 2nd mate |
| | P4 | Ground | 1st mate |
| | P5 | Ground | 2nd mate |
| | P6 | Ground | 2nd mate |
| | P7 | V ₅ | 5V power, pre-charge, 2nd mate |
| | P8 | V ₅ | 5V power |
| | P9 | V ₅ | 5V power |
| | P10 | Ground | 2nd mate |
| | P11 | Reserved | The pin corresponding to P11 in the backplane receptacle connector is also reserved. The corresponding pin to be mated with P11 in the power cable receptacle connector shall always be grounded. |
| | P12 | Ground | 1st mate. |
| | P13 | V ₁₂ | 12V power, pre-charge, 2nd mate |
| | P14 | V ₁₂ | 12V power |
| | P15 | V ₁₂ | 12V power |

NOTE

- All pins are in a single row, with a 1.27 mm (0.050”) pitch.
- The comments on the mating sequence apply to the case of backplane blindmate connector only. In this case, the mating sequences are:
 - the ground pins P4 and P12.
 - the pre-charge power pins and the other ground pins.
 - the signal pins and the rest of the power pins.
- There are three power pins for each voltage. One pin from each voltage is used for pre-charge when installed in a blind-mate backplane configuration.
- All used voltage pins (V_x) must be terminated.

5.3 SUPPORTED ATA COMMANDS

The following table lists Serial ATA standard commands that the drive supports. For a detailed description of the ATA commands, refer to the Serial ATA: High Speed Serialized AT Attachment specification. See “S.M.A.R.T. commands” on page 30 for details and subcommands used in the S.M.A.R.T. implementation.

| COMMAND NAME | COMMAND CODE (IN HEX) | |
|--|-----------------------|-----------------|
| ATA-STANDARD COMMANDS | | |
| Device Configuration Restore | B1h/C0h | |
| Device Configuration Freeze Lock | B1h/C1h | |
| Device Configuration Identify | B1h/C2h | |
| Device Configuration Set | B1h/C3h | |
| Download Microcode | 92h | |
| Execute Device Diagnostics | 90h | |
| Flush Cache | E7h | |
| Flush Cache Extended | EAh | |
| Identify Device | ECh | |
| Initialize Device Parameters | 91h | |
| Read Buffer | E4h | |
| Read DMA | C8h | |
| Read DMA Extended | 25h | |
| Read DMA without Retries | C9h | |
| Read Long with Retries | 22h | |
| Read Long without Retries | 23h | |
| Read Multiple | C4h | |
| Read Multiple Extended | 29h | |
| Read Native Max Address | F8h | |
| Read Native Max Address Extended | 27h | |
| Read Sectors | 20h | |
| Read Sectors Extended | 24h | |
| Read Sectors without Retries | 21h | |
| Read Verify Sectors | 40h | |
| Read Verify Sectors Extended | 42h | |
| Read Verify Sectors without Retries | 41h | |
| Seek | 70h | |
| Set Features | EFh | |
| Set Max Address | F9h | |
| Note: Individual Set Max commands are identified by the value placed in the Set Max Features register as defined to the right. | Address: | 00 _H |
| | Password: | 01 _H |
| | Lock: | 02 _H |
| | Unlock: | 03 _H |
| | Freeze Lock: | 04 _H |
| Set Multiple Mode | C6h | |
| S.M.A.R.T. Disable Operations | B0h/D9h | |

| COMMAND NAME | COMMAND CODE (IN HEX) |
|---|------------------------------|
| S.M.A.R.T. Enable/Disable Autosave | B0h/D2h |
| S.M.A.R.T. Enable Operations | B0h/D8h |
| S.M.A.R.T. Enable/Disable Auto Offline | B0h/DBh |
| S.M.A.R.T. Enable One Attribute Modification | B0h/E0h |
| S.M.A.R.T. Execute Offline | B0h/D4h |
| S.M.A.R.T. Read Attribute Thresholds | B0h/D1h |
| S.M.A.R.T. Read Data | B0h/D0h |
| S.M.A.R.T. Read Log Sector | B0h/D5h |
| S.M.A.R.T. Return Status | B0h/DAh |
| S.M.A.R.T. Save Attribute Values | B0h/D3h |
| S.M.A.R.T. Write Attribute Thresholds | B0h/D7h |
| S.M.A.R.T. Write Attribute Values | B0h/E1h |
| S.M.A.R.T. Write Log Sector | B0h/D6h |
| Write Buffer | E8h |
| Write DMA | CAh |
| Write DMA Extended | 35h |
| Write DMA without Retries | CBh |
| Write Long with Retries | 32h |
| Write Long without Retries | 33h |
| Write Multiple | C5h |
| Write Multiple Extended | 39h |
| Write Sectors | 30h, 31h |
| Write Sectors Extended | 34h |
| Write Uncorrectable | 45h |
| ATA-STANDARD POWER-MANAGEMENT COMMANDS | |
| Check Power Mode | E5h |
| Idle | E3h |
| Idle Immediate | E1h |
| Sleep | E6h |
| Standby | E2h |
| Standby Immediate | E0h |
| ATA-STANDARD SECURITY COMMANDS | |
| Security Set Password | F1h |
| Security Unlock | F2h |
| Security Erase Prepare | F3h |
| Security Erase Unit | F4h |
| Security Freeze Lock | F5h |
| Security Disable Password | F6h |

5.3.1 Identify Device command

The Identify Device command (command code EC_H) transfers information about the drive to the host following power up. The data is organized as a single 512-byte block of data, whose contents are shown in the table on page 27. All reserved bits or words should be set to zero. Parameters listed with an “x” are drive-specific or vary with the state of the drive.

The following commands contain drive-specific features that may not be included in the Serial ATA specification.

| WORD | DESCRIPTION | VALUE |
|-------|--|---|
| 0 | Configuration information: <ul style="list-style-type: none"> • Bit 15: 0 = ATA; 1 = ATAPI • Bit 7: removable media • Bit 6: removable controller • Bit 0: reserved | 0C5A _H |
| 1 | Number of logical cylinders | 16,383 |
| 2 | ATA-reserved | 0000 _H |
| 3 | Number of logical heads | 16 |
| 4 | Retired | 0000 _H |
| 5 | Retired | 0000 _H |
| 6 | Number of logical sectors per logical track: 63 | 003F _H |
| 7–9 | Retired | 0000 _H |
| 10–19 | Serial number: (20 ASCII characters, 0000 _H = none) | ASCII |
| 20 | Retired | 0000 _H |
| 21 | Retired | 0400 _H |
| 22 | Obsolete | 0000 _H |
| 23–26 | Firmware revision (8 ASCII character string, padded with blanks to end of string) | x.xx |
| 27–46 | Drive model number: (40 ASCII characters, padded with blanks to end of string) | ST320LT007 - 9ZV142 ST320LT009 - 9WC142 ST320LT014 - 9YK142 ST250LT007 - 9ZV14C ST250LT009 - 9WC14C ST250LT014 - 9YK14C ST160LT007 - 9ZV14D ST160LT009 - 9WC14D ST160LT014 - 9YK14D |
| 47 | (Bits 7–0) Maximum sectors per interrupt on Read multiple and Write multiple (16) | 8010 _H |
| 48 | Reserved | 0000 _H |
| 49 | Standard Standby timer, IORDY supported and may be disabled | 2F00 _H |
| 50 | ATA-reserved | 0000 _H |
| 51 | PIO data-transfer cycle timing mode | 0200 _H |
| 52 | Retired | 0200 _H |
| 53 | Words 54–58, 64–70 and 88 are valid | 0007 _H |
| 54 | Number of current logical cylinders | xxxx _H |
| 55 | Number of current logical heads | xxxx _H |
| 56 | Number of current logical sectors per logical track | xxxx _H |
| 57–58 | Current capacity in sectors | xxxx _H |
| 59 | Number of sectors transferred during a Read Multiple or Write Multiple command | xxxx _H |

| WORD | DESCRIPTION | VALUE |
|-------|---|--|
| 60–61 | Total number of user-addressable sectors This field contains a value that is one greater than the total number of user-addressable sectors. The maximum value that shall be placed in this field is 0FFFFFFFh. The 0FFFFFFFh value applies to all capacities over 137GB (see Section 2.2 and 2.3 for related information). | ST320LT007 = 0FFFFFFFh ST320LT009 = 0FFFFFFFh ST320LT014 = 0FFFFFFFh ST250LT007 = 0FFFFFFFh ST250LT009 = 0FFFFFFFh ST250LT014 = 0FFFFFFFh ST160LT007 = 0FFFFFFFh ST160LT009 = 0FFFFFFFh ST160LT014 = 0FFFFFFFh |
| 62 | Retired | 0000 _H |
| 63 | Multiword DMA active and modes supported (see note following this table) | xx07 _H |
| 64 | Advanced PIO modes supported (modes 3 and 4 supported) | 0003 _H |
| 65 | Minimum multiword DMA transfer cycle time per word (120 nsec) | 0078 _H |
| 66 | Recommended multiword DMA transfer cycle time per word (120 nsec) | 0078 _H |
| 67 | Minimum PIO cycle time without IORDY flow control (120 nsec) | 0078 _H |
| 68 | Minimum PIO cycle time with IORDY flow control (120 nsec) | 0078 _H |
| 69–74 | ATA-reserved | 0000 _H |
| 75 | Queue depth | 001F _H |
| 76 | Serial ATA capabilities | 0F06 _H |
| 77 | ATA-reserved | 0000 _H |
| 78 | Serial ATA features supported | 0048 _H |
| 79 | Serial ATA features enabled | 0040 _H |
| 80 | Major version number | 01F0 _H |
| 81 | Minor version number | 0029 _H |
| 82 | Command sets supported | 746B _H |
| 83 | Command sets supported | 7D09 _H |
| 84 | Command sets support extension | 61E3 _H |
| 85 | Command sets enabled | 7469 _H |
| 86 | Command sets enabled | 0001 _H |
| 87 | Command sets enable extension | 61E3 _H |
| 88 | Ultra DMA support and current mode (see note following this table) | xx7F _H |
| 89 | Security erase time | 0000 _H |
| 90 | Enhanced security erase time | 0000 _H |
| 92 | Master password revision code | FFFE _H |
| 93 | Hardware reset value (see description following this table) | xxxx _H |
| 94 | Auto acoustic management setting | xxxx _H |
| 95–99 | ATA-reserved | 0000 _H |

| WORD | DESCRIPTION | VALUE |
|---------|---|--|
| 100–103 | Total number of user-addressable LBA sectors available (see Section 2.2 for related information) These words are required for drives that support the 48-bit addressing feature. Maximum value: 0000FFFFFFFFh. | ST320LT007 = 625,142,448 ST320LT009 = 625,142,448 ST320LT014 = 625,142,448 ST250LT007 = 488,397,168 ST250LT009 = 488,397,168 ST250LT014 = 488,397,168 ST160LT007 = 312,581,808 ST160LT009 = 312,581,808 ST160LT014 = 312,581,808 |
| 104–118 | ATA-reserved | 0000 _H |
| 119 | Free Fall Protection support (bit 5) | 1 = Free Fall Protection supported 0 = Free Fall Protection not supported |
| 120 | Free Fall Protection enable/disable (bit 5) | 1 = Free Fall Protection feature is enabled 0 = Free Fall Protection feature is disabled |
| 121–127 | ATA reserved | 0000 _H |
| 128 | Security status | 0021 _H |
| 129–159 | Seagate-reserved | xxxx _H |
| 160–254 | ATA-reserved | 0000 _H |
| 255 | Integrity word | xxA5 _H |

NOTE See the bit descriptions below for words 63, 88, and 93 of the Identify Drive data:

| Description (if bit is set to 1) | | |
|----------------------------------|---|--|
| BIT | WORD 63 | |
| 0 | Multiword DMA mode 0 is supported. | |
| 1 | Multiword DMA mode 1 is supported. | |
| 2 | Multiword DMA mode 2 is supported. | |
| 8 | Multiword DMA mode 0 is currently active. | |
| 9 | Multiword DMA mode 1 is currently active. | |
| 10 | Multiword DMA mode 2 is currently active. | |

| BIT | WORD 88 |
|------------|--|
| 0 | Ultra DMA mode 0 is supported. |
| 1 | Ultra DMA mode 1 is supported. |
| 2 | Ultra DMA mode 2 is supported. |
| 3 | Ultra DMA mode 3 is supported. |
| 4 | Ultra DMA mode 4 is supported. |
| 5 | Ultra DMA mode 5 is supported |
| 6 | Ultra DMA mode 6 is supported |
| 8 | Ultra DMA mode 0 is currently active. |
| 9 | Ultra DMA mode 1 is currently active. |
| 10 | Ultra DMA mode 2 is currently active. |
| 11 | Ultra DMA mode 3 is currently active. |
| 12 | Ultra DMA mode 4 is currently active. |
| 13 | Ultra DMA mode 5 is currently active. |
| 14 | Ultra DMA mode 6 is currently active. |
| BIT | WORD 93 |
| 13 | 1 = 80-conductor cable detected, CBLID above VIH 0 = 40-conductor cable detected, CBLID below VIL |

5.3.2 Set Features command

This command controls the implementation of various features that the drive supports. When the drive receives this command, it sets BSY, checks the contents of the Features register, clears BSY and generates an interrupt. If the value in the register does not represent a feature that the drive supports, the command is aborted. Power-on default has the read look-ahead and write caching features enabled. The acceptable values for the Features register are defined as follows:

Table 8 Set Features command values

| | |
|-----------------|---|
| 02 _H | Enable write cache (<i>default</i>). |
| 03 _H | Set transfer mode (based on value in Sector Count register). Sector Count register values: |
| 00 _H | Set PIO mode to default (PIO mode 2). |
| 01 _H | Set PIO mode to default and disable IORDY (PIO mode 2). |
| 08 _H | PIO mode 0 |
| 09 _H | PIO mode 1 |
| 0A _H | PIO mode 2 |
| 0B _H | PIO mode 3 |
| 0C _H | PIO mode 4 (<i>default</i>) |
| 20 _H | Multiword DMA mode 0 |
| 21 _H | Multiword DMA mode 1 |
| 22 _H | Multiword DMA mode 2 |
| 40 _H | Ultra DMA mode 0 |
| 41 _H | Ultra DMA mode 1 |
| 42 _H | Ultra DMA mode 2 |
| 43 _H | Ultra DMA mode 3 |
| 44 _H | Ultra DMA mode 4 |
| 45 _H | Ultra DMA mode 5 |
| 46 _H | Ultra DMA mode 6 |
| 55 _H | Disable read look-ahead (read cache) feature. |
| 82 _H | Disable write cache |
| AA _H | Enable read look-ahead (read cache) feature (<i>default</i>). |
| C1 _H | Disable the Free Fall Protection feature (41 _H above enables the Free Fall Protection feature) |
| F1 _H | Report full capacity available |

NOTE At power-on, or after a hardware or software reset, the default values of the features are as indicated above.

5.3.3 S.M.A.R.T. commands

S.M.A.R.T. provides near-term failure prediction for disk drives. When S.M.A.R.T. is enabled, the drive monitors predetermined drive attributes that are susceptible to degradation over time. If self-monitoring determines that a failure is likely, S.M.A.R.T. makes a status report available to the host. Not all failures are predictable. S.M.A.R.T. predictability is limited to the attributes the drive can monitor. For more information on S.M.A.R.T. commands and implementation, see the *Draft ATA-8 Standard*.

SeaTools diagnostic software activates a built-in drive self-test (DST S.M.A.R.T. command for D4_H) that eliminates unnecessary drive returns. The diagnostic software ships with all new drives and is also available at: <http://seatools.seagate.com>.

This drive is shipped with S.M.A.R.T. features disabled. You must have a recent BIOS or software package that supports S.M.A.R.T. to enable this feature. The table below shows the S.M.A.R.T. command codes that the drive uses.

Table 9 S.M.A.R.T. commands

| CODE IN FEATURES REGISTER | S.M.A.R.T. COMMAND |
|---------------------------|--|
| D0 _H | S.M.A.R.T. Read Data |
| D1 _H | Vendor-specific |
| D2 _H | S.M.A.R.T. Enable/Disable Attribute Autosave |
| D3 _H | S.M.A.R.T. Save Attribute Values |
| D4 _H | S.M.A.R.T. Execute Off-line Immediate (runs DST) |
| D5 _H | S.M.A.R.T. Read Log Sector |
| D6 _H | S.M.A.R.T. Write Log Sector |
| D7 _H | Vendor-specific |
| D8 _H | S.M.A.R.T. Enable Operations |
| D9 _H | S.M.A.R.T. Disable Operations |
| DA _H | S.M.A.R.T. Return Status |

NOTE

If an appropriate code is not written to the Features Register, the command is aborted and 0x04 (abort) is written to the Error register.

Index

A

ACA 15
acoustics 5, 13
Active mode 10
Address 23
AFR 14
Agency certification 14
Altitude 11
Altitude, nonoperating 4
Altitude, operating 4
Ambient temperature 4, 11
ambient temperature 7
Annualized Failure Rate 14
Annualized Failure Rate (AFR) 5
Areal density 4, 7
ATA commands 23
ATA data-transfer modes supported 4
Australia/New Zealand Standard AS/NZ CISPR22 15
Australian Communication Authority (ACA) 15
Australian C-Tick 15
Average seek time 7
Average seek, read 4

B

bels 5
BPI 4
buffer 4, 7
Bytes per physical sector 4, 6

C

cables and connectors 18
Cache 4
cache 7
capacity 6
CE mark 14
certification 14
Check Power Mode 24
chemical substances 16
China RoHS directive 16
Class B computing device 15
compatibility 14
Conducted noise 9
Conducted RF immunity 13
Configuring the drive 17
connectors 18
CSA60950-1 14
current 4
cycles 14
Cylinders 6

D

data-transfer rates 2
DC power 8
Default logical geometry 6
density 4
Device Configuration Freeze Lock 23
Device Configuration Restore 23
Device Configuration Set 23
Diagnostics 23
dimensions 19, 20
Disks 4
dissipation 8
Download Microcode 23

E

Electrical fast transient 13
Electromagnetic compatibility 14
Electromagnetic Compatibility (EMC) 14
Electromagnetic Compatibility control Regulation 14
Electromagnetic Compatibility Directive (2004/108/EC) 14
Electromagnetic immunity 13
Electrostatic discharge 13
electrostatic discharge (ESD) 17
EN 55022, Class B 14
EN 55024 14
EN60950 14
Environmental protection 16
Environmental specifications 11
error-correction algorithms 2
errors 5, 14
ESD 17
EU 14
European Union (EU) requirements 14
European Union Restriction of Hazardous Substances 16
evice Configuration Identify 23
Execute Device Diagnostics 23

F

FCC verification 15
features 2
Federal Communications Commission 15
Federal Information Processing Standard 21
FIPS 21
Flush Cache 23
Flush Cache Extended 23
Formatted capacity 4, 6
Freeze Lock 23

G

geometry 6
gradient 4

Guaranteed lba 4, 6
guaranteed sectors 6

H

handling 17
Handling precautions 17
heads 6
Height 4
height 7
Humidity 11
humidity 4

I

I/O data-transfer rate 4, 7
Identify 23
Identify Device 23
Identify Device command 25
Idle 8, 24
Idle and Standby timers 10
Idle Immediate 24
Idle mode 4, 10
Idle mode power 8
Information Technology Equipment (ITE) 14
Initialize Device Parameters 23
Input noise ripple 9
Interface 7
interface 22
Interleave 7
Internal data transfer rate 4
Internal data-transfer rate 7
ITE 14

K

KCC 14
Korean Communications Commission 14
Korean RRL 14

L

latency 4
LBA mode 6
Length 4
length 7
Load/Unload 14
logical geometry 6

M

Max Address 23
maximum temperature 11
Microcode 23
mounting 18
mounting screws 12
mounting the drive 17

N

National Institute of Standards and Technology 21
NIST 21
noise 9
nominal power 7
Nonoperating shock 12
Nonoperating vibration 12
Nonrecoverable read errors 5
nonrecoverable read errors 14

O

Operating shock 12
Operating vibration 12

P

Physical characteristics 7
Physical organization 6
Physical read/write heads 4
point-to-point 3, 17
Power consumption 8
power dissipation 8
power management 10
power on/off cycles 14
Power specifications 8
Power-management modes 10
Power-on to Ready 8
Power-on to ready 4
precautions 17, 18
programmable power management 10

Q

quick reference 4

R

Radiated RF immunity 13
Radio and television interference 15
radio frequency (RF) 13
random track location 8
Read Buffer 23
Read DMA 23
Read DMA Extended 23
Read DMA without Retries 23
read errors 5, 14
Read Long with Retries 23
Read Long without Retries 23
Read Multiple 23
Read Multiple Extended 23
Read Native Max Address 23
Read Native Max Address Extended 23
Read Sectors 23
Read Sectors Extended 23
Read Sectors without Retries 23
Read Verify Sectors 23

- Read Verify Sectors Extended 23
- Read Verify Sectors without Retries 23
- Read/write heads 6
- Read/write power 4
- read/write power and current 8
- Recording density 4, 7
- Recording method 7
- Recording technology 7
- Relative humidity 4, 11
- Reliability 14
- resistance 9
- Retries 23
- RF 13
- RoHS 16
- RPM 4
- RRL 14

S

- S.M.A.R.T. 24
- S.M.A.R.T. implementation 23
- Safety certification 14
- SATA 7, 22
- screws 12, 18
- Seagate Technology Support Services 1
- sector 6
- Sectors per track 6
- Security Disable Password 24
- Security Erase Prepare 24
- Security Erase Unit 24
- Security Freeze Lock 24
- Security Set Password 24
- Security Unlock 24
- Seek 23
- seek mode 8
- Seek time 7
- seek time 4
- Seeking 8
- Self refresh, low power 10
- Serial ATA 7
- Serial ATA (SATA) interface 22
- servo electronics 8
- Set Features 23
- Set Max Address 23
- Set Multiple Mode 23
- Shock 12
- Shock, nonoperating 5
- Shock, operating 5
- single-track seeks 7
- Sleep 8, 24
- Sleep mode 4, 10
- sound power 5
- Specification summary table 4
- Spindle speed 4, 7
- Spinup 8
- spinup power 8

- Standby 8, 24
- Standby Immediate 24
- Standby mode 4, 8, 10
- Standby to Ready 8
- Standby to ready 4
- Start/stop times 8
- Startup current 4
- static-discharge 17
- Surge immunity 13

T

- tamper evident stickers 19
- temperature 4, 7, 11
- Temperature gradient 4, 11
- timers 10
- TPI 4
- Track density 4, 7
- Track-to-track seek time 4, 7

U

- UL60950-1 14

V

- Vibration 12
- Vibration, nonoperating 5
- Vibration, operating 5
- Voltage dips, interrupts 13
- Voltage tolerance 4, 9

W

- Warranty 14
- Weight 4
- weight 7
- Wet bulb temperature 4, 11
- Width 4
- width 7
- Write Buffer 24
- Write DMA 24
- Write DMA Extended 24
- Write Long with Retries 24
- Write Long without Retries 24
- Write Multiple 24
- Write Sectors 24
- Write Sectors Extended 24
- write uncorrectable 24



Seagate Technology LLC

AMERICAS Seagate Technology LLC 10200 South De Anza Boulevard, Cupertino, California 95014, United States, 408-658-1000

ASIA/PACIFIC Seagate Singapore International Headquarters Pte. Ltd. 7000 Ang Mo Kio Avenue 5, Singapore 569877, 65-6485-3888

EUROPE, MIDDLE EAST AND AFRICA Seagate Technology SAS 16-18 rue du Dôme, 92100 Boulogne-Billancourt, France, 33 1-4186 10 00

*Publication Number: 100625253, Rev. G
November 2012*