



Archive HDD

v2 SATA Product Manual

ST8000AS0022

100795782, Rev. A
Gen 2 - January 2016

Document Revision History

| Revision | Date | Pages affected and Description of Change |
|----------|------------|--|
| Rev. A | 01/26/2016 | Initial release. |

© 2016 Seagate Technology LLC. All rights reserved.

Publication number: 100795782, Rev. A January 2016

Seagate, Seagate Technology and the Spiral logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. SmartAlign, AcuTrac and SeaTools are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners.

No part of this publication may be reproduced in any form without written permission of Seagate Technology LLC.

Call 877-PUB-TEK1 (877-782-8351) to request permission.

When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Actual quantities will vary based on various factors, including file size, file format, features and application software. Actual data rates may vary depending on operating environment and other factors. The export or re-export of hardware or software containing encryption may be regulated by the U.S. Department of Commerce, Bureau of Industry and Security (for more information, visit www.bis.doc.gov), and controlled for import and use outside of the U.S. Seagate reserves the right to change, without notice, product offerings or specifications.

Contents

| | |
|---|----------|
| Seagate® Technology Support Services | 4 |
|---|----------|

| | |
|------------------------------------|----------|
| 1.0 Introduction | 5 |
| 1.1 About the SATA interface | 5 |
| 1.2 Zone Structure | 6 |

| | |
|--|----------|
| 2.0 Drive Specifications | 7 |
| 2.1 Formatted capacity | 9 |
| 2.1.1 LBA mode | 9 |
| 2.2 Default logical geometry | 9 |
| 2.3 Recording and interface technology | 9 |
| 2.4 Physical characteristics | 10 |
| 2.5 Seek time | 10 |
| 2.6 Start/stop times | 10 |
| 2.7 Power specifications | 11 |
| 2.7.1 Power consumption | 11 |
| 2.7.2 Conducted noise | 12 |
| 2.7.3 Voltage tolerance | 12 |
| 2.7.4 Extended Power Conditions - PowerChoice™ | 13 |
| 2.8 Environmental specifications | 15 |
| 2.8.1 Temperature | 15 |
| 2.8.2 Temperature gradient | 15 |
| 2.8.3 Humidity | 15 |
| 2.8.4 Altitude | 15 |
| 2.8.5 Shock | 16 |
| 2.8.6 Operating vibration | 16 |
| 2.8.7 Non-operating vibration | 16 |
| 2.9 Acoustics | 16 |
| 2.9.1 Test for Prominent Discrete Tones (PDTs) | 16 |
| 2.10 Electromagnetic immunity | 17 |
| 2.11 Reliability - Mean Time Between Failure | 17 |
| 2.12 Warranty | 17 |
| 2.12.1 Storage | 17 |
| 2.13 Agency certification | 18 |
| 2.13.1 Safety certification | 18 |
| 2.13.2 Electromagnetic compatibility | 18 |
| 2.13.3 FCC verification | 18 |
| 2.14 Environmental protection | 19 |
| 2.14.1 European Union Restriction of Hazardous Substances (RoHS) Directive | 19 |
| 2.14.2 China Restriction of Hazardous Substances (RoHS) Directive | 19 |
| 2.15 Corrosive environment | 19 |

| | |
|---|-----------|
| 3.0 Configuring and Mounting the Drive | 20 |
| 3.1 Handling and static-discharge precautions | 20 |
| 3.2 Configuring the drive | 20 |
| 3.3 SATA cables and connectors | 20 |
| 3.4 Drive mounting | 21 |

| | |
|--|-----------|
| 4.0 SATA Interface | 22 |
| 4.1 Hot-Plug compatibility | 22 |
| 4.2 SATA device plug connector pin definitions | 23 |
| 4.3 Supported ATA commands | 24 |
| 4.3.1 ZAC Supported Capabilities log page | 26 |
| 4.3.2 Identify Device command | 27 |
| 4.3.3 Set Features command | 31 |
| 4.3.4 S.M.A.R.T. commands | 32 |

Figures

| | | |
|----------|---|----|
| Figure 1 | Typical 5V & 12V - 6Gb/s startup and operation current profiles | 12 |
| Figure 2 | Attaching SATA cabling..... | 20 |
| Figure 3 | Mounting dimensions | 21 |

Seagate® Technology Support Services

For information regarding online support and services, visit: <http://www.seagate.com/contacts/>

For information regarding Warranty Support, visit: <http://www.seagate.com/support/warranty-and-replacements/>

For information regarding data recovery services, visit: <http://www.seagate.com/services-software/seagate-recovery-services/recover/>

For Seagate OEM, Distribution partner and reseller portals, visit: <http://www.seagate.com/partners/>

1.0 Introduction

This manual describes the functional, mechanical and interface specifications for the following Seagate® Archive HDD model drives:

Standard model

ST8000AS0022

Note

Previous generations of Seagate Self-Encrypting Drive models were called Full Disk Encryption (FDE) models before a differentiation between drive-based encryption and other forms of encryption was necessary.

These drives provide the following key features:

- Host aware, optimized for SMR performance and capable of ZAC command support
- High instantaneous (burst) data-transfer rates (up to 600MB per second).
- Streaming video optimization - consistent command completion times & ERC support
- Idle3 power mode support
- TGMR recording technology provides the drives with increased areal density.
- State-of-the-art cache and on-the-fly error-correction algorithms.
- Native Command Queuing with command ordering to increase performance in demanding applications.
- Full-track multiple-sector transfer capability without local processor intervention.
- Seagate AcuTrac™ servo technology delivers dependable performance, even with hard drive track widths of only 75 nanometers.
- Seagate SmartAlign™ technology provides a simple, transparent migration to Advanced Format 4K sectors
- Quiet operation.
- Compliant with RoHS requirements in China and Europe.
- SeaTools diagnostic software performs a drive self-test that eliminates unnecessary drive returns.
- Support for S.M.A.R.T. drive monitoring and reporting.
- Supports latching SATA cables and connectors.
- Worldwide Name (WWN) capability uniquely identifies the drive.

1.1 About the SATA interface

The Serial ATA (SATA) interface provides several advantages over the traditional (parallel) ATA interface. The primary advantages include:

- Easy installation and configuration with true plug-and-play connectivity. It is not necessary to set any jumpers or other configuration options.
- Thinner and more flexible cabling for improved enclosure airflow and ease of installation.
- Scalability to higher performance levels.

In addition, SATA makes the transition from parallel ATA easy by providing legacy software support. SATA was designed to allow users to install a SATA host adapter and SATA disk drive in the current system and expect all of the existing applications to work as normal.

The SATA interface connects each disk drive in a point-to-point configuration with the SATA host adapter. There is no master/slave relationship with SATA devices like there is with parallel ATA. If two drives are attached on one SATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. This essentially means both drives behave as if they are Device 0 (master) devices.

The SATA host adapter and drive share the function of emulating parallel ATA device behavior to provide backward compatibility with existing host systems and software. The Command and Control Block registers, PIO and DMA data transfers, resets, and interrupts are all emulated.

The SATA host adapter contains a set of registers that shadow the contents of the traditional device registers, referred to as the Shadow Register Block. All SATA devices behave like Device 0 devices. For additional information about how SATA emulates parallel ATA, refer to the “Serial ATA International Organization: Serial ATA Revision 3.2”. The specification can be downloaded from www.sata-io.org.

Note

The host adapter may, optionally, emulate a master/slave environment to host software where two devices on separate SATA ports are represented to host software as a Device 0 (master) and Device 1 (slave) accessed at the same set of host bus addresses. A host adapter that emulates a master/slave environment manages two sets of shadow registers. This is not a typical SATA environment.

1.2 Zone Structure

Archive HDD models use SMR (Shingled Magnetic Recording Technology), physically formatted containing two types of zones. 64 “Conventional Zones” which are not associated with write pointer, and the media is non-SMR and 29808 Sequential Write preferred Zones which are SMR media. For the sequential write referred zones there is a write pointer to indicated preferred write location. For the conventional zone writes can occur randomly for any block size. New commands which report zonal structure, resetting zonal write pointers, as well as managing zonal properties are available for sequential write preferred zones through ZAC commands.

Archive HDD Conventional Zone Structure

- There are 64 256 MiB Conventional Zones. (ie. Not Shingled)
- The conventional zone is located at the outer diameter and is 16GB.
- Sequential Read and Writes to this zones will perform at similar data rates.
- Random Write commands can be issued in any order without any performance delay.
- Zone designed specifically for random writes data. For example: logs and meta data.

There are 29808 Sequential Write Zones

- Each zone is 2e19 logical blocks in size or 256 MiB each.
- Each zone is a shingled zone.
- To achieve best performance use of ZAC commands is required.
- Re-setting write pointers for each zone is required before reuse.

Optimal number of open sequential write preferred zones

- Advised - the largest number of zones that should be open for best performance, is reported in Identify Device Data log 0x30 page 0x00h

Optimal number of non-sequentially written sequential write preferred zones

- Advised - the largest number of write preferred zones that should be randomly written for best performance, is reported in identify device data log 0x30 page 0x00h

T-13 standards define the new ZAC commands; REPORT ZONES EXT to query the drive on what zones exist and their current condition, RESET WRITE POINTER EXT to reset the write pointers, OPEN ZONE EXT, CLOSE ZONE EXT, and FINISH ZONE EXT to Open, Close, and Finish zones. To achieve optimal performance, an SMR-aware Host driver will need to write sequentially to all sequential write referred zones.

See the T13 Web Site at <http://www.t13.org> for ACS-4, T13/BSR INCIT 529 for command details.

2.0 Drive Specifications

Unless otherwise noted, all specifications are measured under ambient conditions, at 25°C, and nominal power. For convenience, the phrases *the drive* and *this drive* are used throughout this manual to indicate the following drive models:

Standard model

ST8000AS0022

Specification summary tables

The specifications listed in [Table 1](#) are for quick reference. For details on specification measurement or definition, refer to the appropriate section of this manual.

Table 1 Drive specifications summary

| Drive Specification* | ST8000AS0022 |
|---|--|
| Formatted capacity (512 bytes/sector)** | 8000GB (8TB) |
| Guaranteed sectors | 15,628,053,168 |
| Heads | 12 |
| Disks | 6 |
| Bytes per sector | 512 |
| Recording density (max) | 1950 KFCI |
| Track density (avg) | 435 KTPI |
| Areal density (avg) | 848 Gb/in ² |
| Internal data transfer rate (max) | 1900 Mb/s |
| Maximum sustained data rate, OD read (MB/s) | 190 MB/s |
| ATA data-transfer modes supported | PIO modes: 0 to 4 Multiword DMA modes: 0 to 2 Ultra DMA modes 0 to 6 |
| I/O data-transfer rate (max) | 600MB/s |
| Cache buffer | 128MB |
| Height (max) | 26.1mm / 1.028 in |
| Width (max) | 101.6mm/4.0 in (± 0.010 in) |
| Length (max) | 146.99mm / 5.787 in |
| Weight (typical) | 780g / 1.72 lb |
| Average latency | 5.5ms |
| Power-on to ready (max) | 30.0s |
| Standby to ready (max) | 25.0s |
| Average seek, read (typical) Average seek, write (typical) | <12.0ms <12.0ms |
| Startup current (typical) 12V | 2.0A |
| Voltage tolerance (including noise) | 5V ±5% 12V ±10% |
| Non-Operating (Ambient °C) | -40 to 70 |
| Operating temperature (drive case min °C) | 0 |
| Operating temperature (drive case max °C) | 60 |
| Temperature gradient | 20°C per hour max (operating) 30°C per hour max (nonoperating) |
| Relative humidity | 5% to 90% (operating) 5% to 95% (nonoperating) |
| Relative humidity gradient (max) | 30% per hour |
| Wet bulb temperature (max) | 26°C max (operating) 29°C max (nonoperating) |
| Altitude, operating | -61 m to 3048m (-200 ft to 10,000 ft) |

Table 1 Drive specifications summary

| Drive Specification* | ST8000AS0022 |
|--|--|
| Altitude, non-operating (below mean sea level, max) | -61m to 12,192m (-200ft to 40,000+ ft) |
| Operational shock (max) | 70 Gs (read) and 40 Gs (write) at 2ms |
| Non-operational shock (max) | 250 Gs at 2ms |
| Vibration, operating | 2Hz to 22Hz: 0.25 Gs, Limited displacement 22Hz to 350Hz: 0.50 Gs 350Hz to 500Hz: 0.25 Gs |
| Vibration, non-operating | 5Hz to 500Hz: 3.0 Gs |
| Drive acoustics, sound power | |
| Idle*** | 2.7 bels (typical) 2.8 bels (max) |
| Seek | 2.8 bels (typical) 2.9 bels (max) |
| Non-recoverable read errors | 1 per 10 ¹⁵ bits read |
| Rated workload | Average rate of <180TB/year. The AFR specification for the drive assumes the I/O workload does not exceed the average annualized workload rate limit of 180TB/year. Workloads exceeding the annualized rate may degrade the drive AFR and impact product reliability. The average annualized workload rate limit is in units of TB per year, or TB per 8760 power-on hours. Workload rate limit = TB transferred × (8760/recorded power-on hours). |
| Warranty | To determine the warranty for a specific drive, use a web browser to access the following web page: http://www.seagate.com/support/warranty-and-replacements/ From this page, click on "Is my Drive under Warranty". Users will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for the drive. |
| Load/unload cycles (25°C, 50% rel. humidity) | 300,000 at 25°C, 50% rel. humidity |
| Supports hotplug operation per the Serial ATA Revision 3.2 specification | Yes |

*All specifications above are based on native configurations.

** One GB equals one billion bytes and 1TB equals one trillion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

*** During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

2.1 Formatted capacity

| Model | Formatted capacity* | Guaranteed sectors | Bytes per sector |
|--------------|---------------------|--------------------|------------------|
| ST8000AS0022 | 8000GB | 15,628,053,168 | 512 |

*One GB equals one billion bytes and 1TB equals one trillion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

2.1.1 LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to $n-1$, where n is the number of guaranteed sectors as defined above.

See Section 4.3.2, "Identify Device command" (words 60-61 and 100-103) for additional information about 48-bit addressing support of drives with capacities over 137GB.

2.2 Default logical geometry

- Cylinders: 16,383
- Read/write heads: 16
- Sectors per track: 63

LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to $n-1$, where n is the number of guaranteed sectors as defined above.

2.3 Recording and interface technology

| | |
|--|------|
| Interface | SATA |
| Recording method | TGMR |
| Recording density (KFCI) | 1950 |
| Track density (Ktracks/inch avg) | 435 |
| Areal density (Gb/in ²) | 848 |
| Internal data transfer rate (Mb/s max) | 1900 |
| Maximum sustained data transfer rate, OD read (MB/s) | 190 |
| I/O data-transfer rate (MB/s max) | 600 |

2.4 Physical characteristics

| | |
|-----------------------|------------------------------------|
| Maximum height | 26.11mm / 1.028 in |
| Maximum width | 101.6mm / 4.0 in (\pm 0.010 in) |
| Maximum length | 146.99mm / 5.787 in |
| Typical weight | 780g / 1.72 lb |
| Cache buffer | 128MB |

2.5 Seek time

Seek measurements are taken with nominal power at 25°C ambient temperature. All times are measured using drive diagnostics. The specifications in the table below are defined as follows:

- Track-to-track seek time is an average of all possible single-track seeks in both directions.
- Average seek time is a true statistical random average of at least 5000 measurements of seeks between random tracks, less overhead.

| Typical seek times (ms) | Read | Write |
|--------------------------------|-------------|--------------|
| Track-to-track | 1.0 | 1.2 |
| Average | <12.0 | |
| Average latency | 5.5 | |

Note

These drives are designed to consistently meet the seek times represented in this manual. Physical seeks, regardless of mode (such as track-to-track and average), are expected to meet the noted values. However, due to the manner in which these drives are formatted, benchmark tests that include command overhead or measure logical seeks may produce results that vary from these specifications.

2.6 Start/stop times

The start/stop times are listed below.

| | |
|---------------------------------------|----------|
| Power-on to ready (in seconds) | 30 (max) |
| Standby to ready (in seconds) | 30 (max) |
| Ready to spindle stop (in seconds) | 12 (max) |

Time-to-ready may be longer than normal if the drive power is removed without going through normal OS powerdown procedures.

2.7 Power specifications

The drive receives DC power (+5V or +12V) through a native SATA power connector. Refer to [Figure 1 on page 12](#).

2.7.1 Power consumption

Power requirements for the drives are listed in [Table 2](#). Typical power measurements are based on an average of drives tested, under nominal conditions, using 5.0V and 12.0V input voltage at 35°C ambient temperature.

Table 2 DC power requirements

| | | 6.0Gb mode | |
|--|--------------|------------|------|
| | | +5V | +12V |
| Voltage | | | |
| Regulation | | ±5% | ±10% |
| Avg Idle Current * | | 0.18 | 0.33 |
| Advanced Idle Current * | | | |
| | Idle_A | 0.14 | 0.34 |
| | Idle_B | 0.13 | 0.29 |
| | Idle_C | 0.14 | 0.14 |
| | Standby | 0.12 | 0.01 |
| Maximum Start Current | | | |
| | DC (peak DC) | 0.33 | 1.42 |
| | AC (peak DC) | 0.49 | 2.11 |
| Peak operating current (random read): | | | |
| | Typical DC | 0.22 | 0.61 |
| | Maximum DC | 0.22 | 0.63 |
| Peak operating current (random write) | | | |
| | Typical DC | 0.49 | 0.32 |
| | Maximum DC | 0.49 | 0.40 |
| Peak operating current (sequential read) | | | |
| | Typical DC | 0.46 | 0.39 |
| | Maximum DC | 0.47 | 0.40 |
| Peak operating current (sequential write) | | | |
| | Typical DC | 0.37 | 0.40 |
| | Maximum DC | 0.37 | 0.41 |

* During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

2.7.1.1 Typical current profiles

Archive HDD current profiles

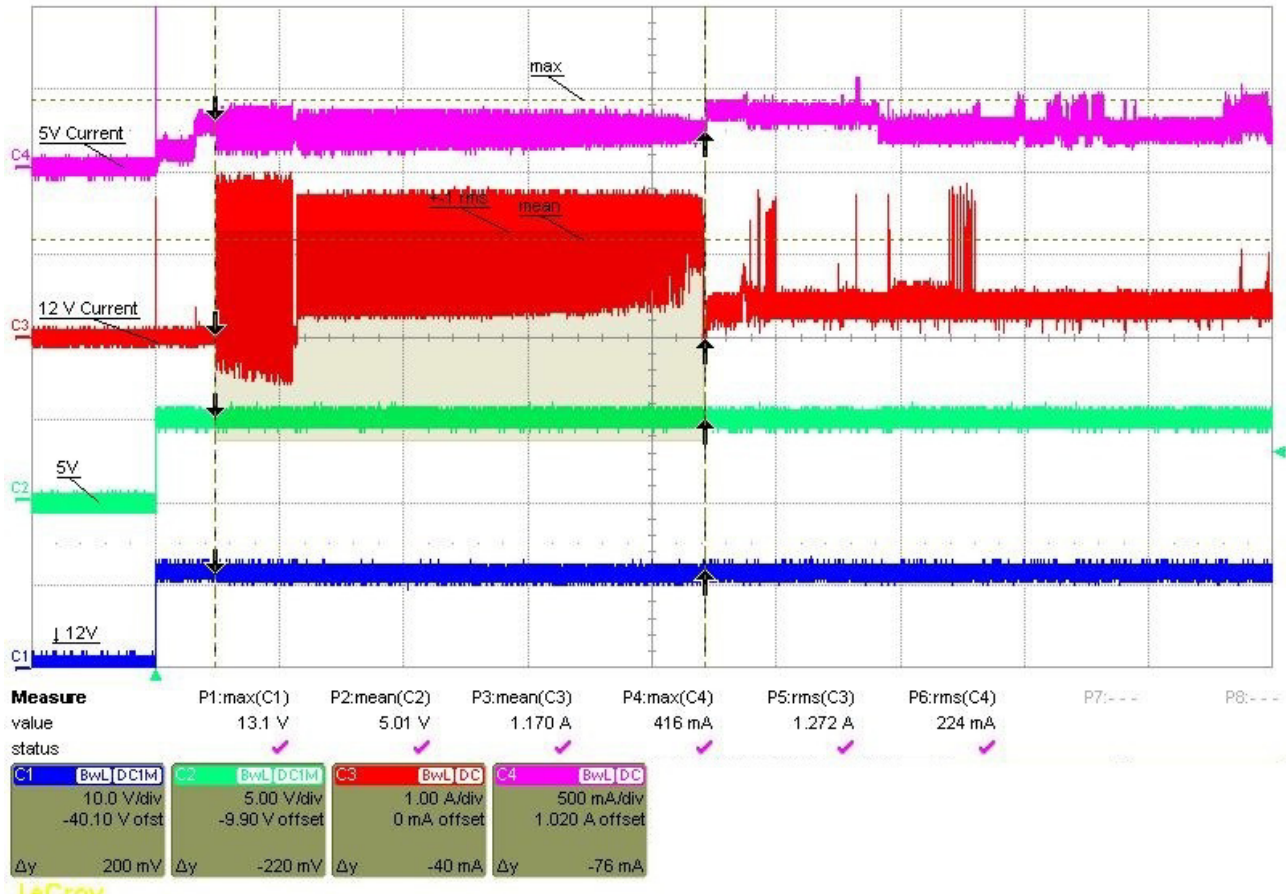


Figure 1 Typical 5V & 12V - 6Gb/s startup and operation current profiles

2.7.2 Conducted noise

Input noise ripple is measured at the host system power supply across an equivalent 80-ohm resistive load on the +12 volt line or an equivalent 15-ohm resistive load on the +5 volt line.

- Using 12-volt power, the drive is expected to operate with a maximum of 120 mV peak-to-peak square-wave injected noise at up to 10MHz.
- Using 5-volt power, the drive is expected to operate with a maximum of 100 mV peak-to-peak square-wave injected noise at up to 10MHz.

Note Equivalent resistance is calculated by dividing the nominal voltage by the typical RMS read/write current.

2.7.3 Voltage tolerance

Voltage tolerance (including noise):

- 5V ±5%
- 12V ±10%

2.7.4 Extended Power Conditions - PowerChoice™

Utilizing the load/unload architecture a programmable power management interface is provided to tailor systems for reduced power consumption and performance requirements.

The table below lists the supported power conditions available in PowerChoice. Power conditions are ordered from highest power consumption (and shortest recovery time) to lowest power consumption (and longest recovery time) as follows: Idle_a power >= Idle_b power >= Idle_c power >= Standby_z power. The further users go down in the table, the more power savings is actualized. For example, Idle_b results in greater power savings than the Idle_a power condition. Standby results in the greatest power savings.

| Power Condition Name | Power Condition ID | Description |
|----------------------|--------------------|--|
| Idle_a | 81 _H | Reduced electronics |
| Idle_b | 82 _H | Heads unloaded. Disks spinning at full RPM |
| Idle_c | 83 _H | Heads unloaded. Disks spinning at reduced RPM |
| Standby_z | 00 _H | Heads unloaded. Motor stopped (disks not spinning) |

Each power condition has a set of current, saved and default settings. Default settings are not modifiable. Default and saved settings persist across power-on resets. The current settings do not persist across power-on resets. At the time of manufacture, the default, saved and current settings are in the Power Conditions log match.

PowerChoice is invoked using one of two methods

- Automatic power transitions which are triggered by expiration of individual power condition timers. These timer values may be customized and enabled using the Extended Power Conditions (EPC) feature set using the standardized Set Features command interface.
- Immediate host commanded power transitions may be initiated using an EPC Set Features "Go to Power Condition" sub-command to enter any supported power condition. Legacy power commands Standby Immediate and Idle Immediate also provide a method to directly transition the drive into supported power conditions.

PowerChoice exits power saving states under the following conditions

- Any command which requires the drive to enter the PM0: Active state (media access)
- Power on reset

PowerChoice provides the following reporting methods for tracking purposes

Check Power Mode Command

- Reports the current power state of the drive

Identify Device Command

- EPC Feature set supported flag
- EPC Feature enabled flag is set if at least one Idle power condition timer is enabled

Power Condition Log reports the following for each power condition

- Nominal recovery time from the power condition to active
- If the power condition is Supported, Changeable, and Savable
- Default enabled state, and timer value
- Saved enabled state, and timer value
- Current enabled state, and timer value

S.M.A.R.T. Read Data Reports

- Attribute 192 - Emergency Retract Count
- Attribute 193 - Load/Unload Cycle Count

PowerChoice Manufacture Default Power Condition Timer Values

Default power condition timer values have been established to assure product reliability and data integrity. A minimum timer value threshold of two minutes ensures the appropriate amount of background drive maintenance activities occur. Attempting to set a timer values less than the specified minimum timer value threshold will result in an aborted EPC "Set Power Condition Timer" subcommand.

| Power Condition Name | Manufacturer Default Timer Values |
|----------------------|--|
| Idle_a | 1 sec |
| Idle_b | 5 min |
| Idle_c | 30 min (Default value set - not enabled) |
| Standby_z | 60 min (Default value set - not enabled) |

Setting power condition timer values less than the manufacturer specified defaults or issuing the EPC "Go to Power Condition" subcommand at a rate exceeding the default timers may limit this products reliability and data integrity.

PowerChoice Supported Extended Power Condition Feature Subcommands

| EPC Subcommand | Description |
|-----------------|----------------------------------|
| 00 _H | Restore Power Condition Settings |
| 01 _H | Go to Power Condition |
| 02 _H | Set Power Condition Timer |
| 03 _H | Set Power Condition State |
| 04 _H | Enable EPC Feature Set |
| 05 _H | Disable EPC Feature Set |

PowerChoice Supported Extended Power Condition Identifiers

| Power Condition Identifiers | Power Condition Name |
|-----------------------------|--------------------------|
| 00 _H | Standby_z |
| 01 - 80 _H | Reserved |
| 81 _H | Idle_a |
| 82 _H | Idle_b |
| 83 _H | Idle_c |
| 84 - FE _H | Reserved |
| FF _H | All EPC Power Conditions |

2.8 Environmental specifications

This section provides the temperature, humidity, shock, and vibration specifications for Archive HDD. Ambient temperature is defined as the temperature of the environment immediately surrounding the drive. Above 1000ft. (305 meters), the maximum temperature is derated linearly by 1°C every 1000 ft. Refer to [Section 3.4 Drive mounting](#) for base plate measurement location.

2.8.1 Temperature

| | |
|--------------------------------------|------------------------------|
| Non-operating (Ambient) | -40° to 70°C (-40° to 158°F) |
| Operating (Drive case min °C) | 0 |
| Operating (Drive case max °C) | 60 |

2.8.2 Temperature gradient

| | |
|----------------------|---|
| Operating | 20°C per hour (36°F per hour max), without condensation |
| Non-operating | 30°C per hour (54°F per hour max) |

2.8.3 Humidity

2.8.3.1 Relative humidity

| | |
|---------------------|---|
| Operating | 5% to 90% non-condensing (30% per hour max) |
| Nonoperating | 5% to 95% non-condensing (30% per hour max) |

2.8.3.2 Wet bulb temperature

| | |
|----------------------|-----------------------|
| Operating | 26°C / 78.8°F (rated) |
| Non-operating | 29°C / 84.2°F (rated) |

2.8.4 Altitude

| | |
|----------------------|---|
| Operating | -61m to 3048m (-200 ft. to 10,000 ft.) |
| Non-operating | -61m to 12,192m (-200 ft. to 40,000+ ft.) |

2.8.5 Shock

All shock specifications assume that the drive is mounted securely with the input shock applied at the drive mounting screws. Shock may be applied in the X, Y or Z axis.

2.8.5.1 Operating shock

These drives comply with the performance levels specified in this document when subjected to a maximum operating shock of 70 Gs (read) and 40 Gs (write) based on half-sine shock pulses of 2ms during read operations. Shocks should not be repeated more than two times per second.

2.8.5.2 Non-operating shock

The non-operating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 250 Gs based on a non-repetitive half-sine shock pulse of 2ms duration.

2.8.6 Operating vibration

The maximum vibration levels that the drive may experience while meeting the performance standards specified in this document are specified below.

| | |
|----------------|--------------------------------|
| 2Hz to 22Hz | 0.25 Gs (Limited displacement) |
| 22Hz to 350Hz | 0.50 Gs |
| 350Hz to 500Hz | 0.25 Gs |

All vibration specifications assume that the drive is mounted securely with the input vibration applied at the drive mounting screws. Vibration may be applied in the X, Y or Z axis. Throughput may vary if improperly mounted.

2.8.7 Non-operating vibration

The maximum non-operating vibration levels that the drive may experience without incurring physical damage or degradation in performance when subsequently put into operation are specified below.

| | |
|--------------|--------|
| 5Hz to 500Hz | 3.0 Gs |
|--------------|--------|

2.9 Acoustics

Drive acoustics are measured as overall A-weighted acoustic sound power levels (no pure tones). All measurements are consistent with ISO document 7779. Sound power measurements are taken under essentially free-field conditions over a reflecting plane. For all tests, the drive is oriented with the cover facing upward.

| | |
|-------------|--|
| Note | For seek mode tests, the drive is placed in seek mode only. The number of seeks per second is defined by the following equation: (Number of seeks per second = $0.4 / (\text{average latency} + \text{average access time})$) |
|-------------|--|

Table 3 Fluid Dynamic Bearing (FDB) motor acoustics

| | Idle* | Seek |
|-----------|--------------------------------------|--------------------------------------|
| 8TB model | 2.7 bels (typical) 2.8 bels (max) | 2.8 bels (typical) 2.9 bels (max) |

*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

2.9.1 Test for Prominent Discrete Tones (PDTs)

Seagate follows the ECMA-74 standards for measurement and identification of PDTs. An exception to this process is the use of the absolute threshold of hearing. Seagate uses this threshold curve (originated in ISO 389-7) to discern tone audibility and to compensate for the inaudible components of sound prior to computation of tone ratios according to Annex D of the ECMA-74 standards.

2.10 Electromagnetic immunity

When properly installed in a representative host system, the drive operates without errors or degradation in performance when subjected to the radio frequency (RF) environments defined in [Table 4](#).

Table 4 Radio frequency environments

| Test | Description | Performance level | Reference standard |
|---------------------------|---|-------------------|---------------------------------|
| Electrostatic discharge | Contact, HCP, VCP: ± 4 kV; Air: ± 8 kV | B | EN61000-4-2: 95 |
| Radiated RF immunity | 80MHz to 1,000MHz, 3 V/m, 80% AM with 1kHz sine 900MHz, 3 V/m, 50% pulse modulation @ 200Hz | A | EN61000-4-3: 96 ENV50204: 95 |
| Electrical fast transient | ± 1 kV on AC mains, ± 0.5 kV on external I/O | B | EN61000-4-4: 95 |
| Surge immunity | ± 1 kV differential, ± 2 kV common, AC mains | B | EN61000-4-5: 95 |
| Conducted RF immunity | 150kHz to 80MHz, 3 Vrms, 80% AM with 1kHz sine | A | EN61000-4-6: 97 |
| Voltage dips, interrupts | 0% open, 5 seconds 0% short, 5 seconds 40%, 0.10 seconds 70%, 0.01 seconds | C C C B | EN61000-4-11: 94 |

2.11 Reliability - Mean Time Between Failure

The product will achieve a Mean Time Between Failure Rate (MTBF) of 1,000,000 hours when operated in an environment of ambient air temperatures of 25°C. Operation at temperatures outside the specifications shown in Section 2.8 may decrease the product MTBF. MTBF is a population statistic that is not relevant to individual units.

- MTBF specifications are based on the following assumptions for NAS environments:
- 8760 power-on hours per year
- 10,000 average motor start/stop cycles per year
- Operations at nominal voltages
- Temperatures outside the specifications in Section 2.8 may reduce the product reliability.

Operation at excessive I/O duty cycle may degrade product reliability. The NAS environment of power-on hours, temperature, and I/O duty cycle affect the product MTBF. The MTBF will be degraded if used in an enterprise application.

2.12 Warranty

To determine the warranty for a specific drive, use a web browser to access the following web page:

<http://www.seagate.com/support/warranty-and-replacements/>

From this page, click on "Is my Drive under Warranty". Users will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for the drive.

2.12.1 Storage

Maximum storage periods are 180 days within original unopened Seagate shipping package or 60 days unpackaged within the defined non-operating limits (refer to environmental section in this manual). Storage can be extended to 1 year packaged or unpackaged under optimal environmental conditions (25°C, <40% relative humidity non-condensing, and non-corrosive environment). During any storage period the drive non-operational temperature, humidity, wet bulb, atmospheric conditions, shock, vibration, magnetic and electrical field specifications should be followed.

2.13 Agency certification

2.13.1 Safety certification

These products are certified to meet the requirements of UL60950-1, CSA60950-1 and EN60950 and so marked as to the certify agency.

2.13.2 Electromagnetic compatibility

Hard drives that display the CE mark comply with the European Union (EU) requirements specified in the Electromagnetic Compatibility Directive (2004/108/EC) as put into place 20 July 2007. Testing is performed to the levels specified by the product standards for Information Technology Equipment (ITE). Emission levels are defined by EN 55022, Class B and the immunity levels are defined by EN 55024.

Drives are tested in representative end-user systems. Although CE-marked Seagate drives comply with the directives when used in the test systems, we cannot guarantee that all systems will comply with the directives. The drive is designed for operation inside a properly designed enclosure, with properly shielded I/O cable (if necessary) and terminators on all unused I/O ports. Computer manufacturers and system integrators should confirm EMC compliance and provide CE marking for their products.

Korean RRL

If these drives have the Korean Communications Commission (KCC) logo, they comply with paragraph 1 of Article 11 of the Electromagnetic Compatibility control Regulation and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Radio Research Laboratory (RRL) Communications Commission, Republic of Korea.

These drives have been tested and comply with the Electromagnetic Interference/Electromagnetic Susceptibility (EMI/EMS) for Class B products. Drives are tested in a representative, end-user system by a Korean-recognized lab.

Australian RCM Compliance Mark

Models displayed with the RCM compliance mark, comply with the mandatory standards as per the Australian Communications and Media Authority (AMCA) Electromagnetic Compatibility (EMC) regulatory arrangement.

2.13.3 FCC verification

These drives are intended to be contained solely within a personal computer or similar enclosure (not attached as an external device). As such, each drive is considered to be a subassembly even when it is individually marketed to the customer. As a subassembly, no Federal Communications Commission verification or certification of the device is required.

Seagate has tested this device in enclosures as described above to ensure that the total assembly (enclosure, disk drive, motherboard, power supply, etc.) does comply with the limits for a Class B computing device, pursuant to Subpart J, Part 15 of the FCC rules. Operation with non-certified assemblies is likely to result in interference to radio and television reception.

Radio and television interference. This equipment generates and uses radio frequency energy and if not installed and used in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception.

This equipment is designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television, which can be determined by turning the equipment on and off, users are encouraged to try one or more of the following corrective measures:

- Reorient the receiving antenna.
- Move the device to one side or the other of the radio or TV.
- Move the device farther away from the radio or TV.
- Plug the computer into a different outlet so that the receiver and computer are on different branch outlets.

If necessary, users should consult the dealer or an experienced radio/television technician for additional suggestions. Users may find helpful the following booklet prepared by the Federal Communications Commission: *How to Identify and Resolve Radio-Television Interference Problems*. This booklet is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Refer to publication number 004-000-00345-4.

2.14 Environmental protection

Seagate designs its products to meet environmental protection requirements worldwide, including regulations restricting certain chemical substances.

2.14.1 European Union Restriction of Hazardous Substances (RoHS) Directive

The European Union Restriction of Hazardous Substances (RoHS) Directive, restricts the presence of chemical substances, including Lead, Cadmium, Mercury, Hexavalent Chromium, PBB and PBDE, in electronic products, effective July 2006. This drive is manufactured with components and materials that comply with the RoHS Directive.

2.14.2 China Restriction of Hazardous Substances (RoHS) Directive 中国限制危险物品的指令

This product has an Environmental Protection Use Period (EPUP) of 20 years. The following table contains information mandated by China's "Marking Requirements for Control of Pollution Caused by Electronic Information Products" Standard.



该产品具有20年的环境保护使用周期（EPUP）。下表包含了中国“电子产品所导致的污染的控制的记号要求”所指定的信息。

| Name of Parts 部件名称 | Toxic or Hazardous Substances or Elements有毒有害物质或元素 | | | | | |
|-----------------------|--|----------------------|----------------------|---|---|---|
| | Lead 铅 (Pb) | Mercury 汞 (Hg) | Cadmium 镉 (Cd) | Hexavalent Chromium 六价铬 (Cr6+) | Polybrominated Diphenyl 多溴联苯 (PBB) | Polybrominated Diphenyl Ether 多溴二苯醚 (PBDE) |
| PCBA | X | O | O | O | O | O |
| HDA | X | O | O | O | O | O |

"O" indicates the hazardous and toxic substance content of the part (at the homogeneous material level) is lower than the threshold defined by the China RoHS MCV Standard.

“O”表示该部件（于同类物品程度上）所含的危险和有毒物质低于中国RoHS MCV标准所定义的阈值。

"X" indicates the hazardous and toxic substance content of the part (at the homogeneous material level) is over the threshold defined by the China RoHS MCV Standard.

“X”表示该部件（于同类物品程度上）所含的危险和有毒物质超出中国RoHS MCV标准所定义的阈值。

2.15 Corrosive environment

Seagate electronic drive components pass accelerated corrosion testing equivalent to 10 years exposure to light industrial environments containing sulfurous gases, chlorine and nitric oxide, classes G and H per ASTM B845. However, this accelerated testing cannot duplicate every potential application environment. Users should use caution exposing any electronic components to uncontrolled chemical pollutants and corrosive chemicals as electronic drive component reliability can be affected by the installation environment. The silver, copper, nickel and gold films used in Seagate products are especially sensitive to the presence of sulfide, chloride, and nitrate contaminants. Sulfur is found to be the most damaging. In addition, electronic components should never be exposed to condensing water on the surface of the printed circuit board assembly (PCBA) or exposed to an ambient relative humidity greater than 95%. Materials used in cabinet fabrication, such as vulcanized rubber, that can outgas corrosive compounds should be minimized or eliminated. The useful life of any electronic equipment may be extended by replacing materials near circuitry with sulfide-free alternatives.

3.0 Configuring and Mounting the Drive

This section contains the specifications and instructions for configuring and mounting the drive.

3.1 Handling and static-discharge precautions

After unpacking, and before installation, the drive may be exposed to potential handling and electrostatic discharge (ESD) hazards. Observe the following standard handling and static-discharge precautions:

Caution

- Before handling the drive, put on a grounded wrist strap, or ground oneself frequently by touching the metal chassis of a computer that is plugged into a grounded outlet. Wear a grounded wrist strap throughout the entire installation procedure.
- Handle the drive by its edges or frame *only*.
- The drive is extremely fragile—handle it with care. Do not press down on the drive top cover.
- Always rest the drive on a padded, antistatic surface until mounting it in the computer.
- Do not touch the connector pins or the printed circuit board.
- Do not remove the factory-installed labels from the drive or cover them with additional labels. Removal voids the warranty. Some factory-installed labels contain information needed to service the drive. Other labels are used to seal out dirt and contamination.

3.2 Configuring the drive

Each drive on the SATA interface connects point-to-point with the SATA host adapter. There is no master/slave relationship because each drive is considered a master in a point-to-point relationship. If two drives are attached on one SATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. Both drives behave as if they are Device 0 (master) devices.

SATA drives are designed for easy installation. It is usually not necessary to set any jumpers on the drive for proper operation; however, if users connect the drive and receive a “drive not detected” error, the SATA-equipped motherboard or host adapter may use a chipset that does not support SATA speed auto-negotiation.


3.3 SATA cables and connectors

The SATA interface cable consists of four conductors in two differential pairs, plus three ground connections. The cable size may be 30 to 26 AWG with a maximum length of one meter (39.37 inches). See [Table 5](#) for connector pin definitions. Either end of the SATA signal cable can be attached to the drive or host.

For direct backplane connection, the drive connectors are inserted directly into the host receptacle. The drive and the host receptacle incorporate features that enable the direct connection to be hot pluggable and blind mateable.

For installations which require cables, users can connect the drive as illustrated in [Figure 2](#).

Figure 2 Attaching SATA cabling

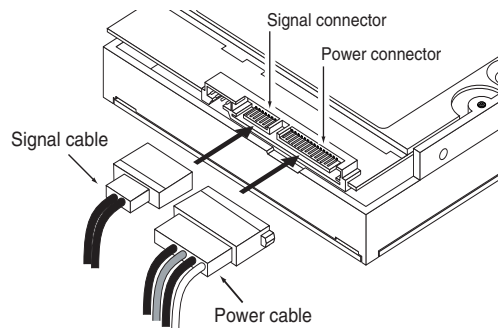


Each cable is keyed to ensure correct orientation. Archive HDD drives support latching SATA connectors.

3.4 Drive mounting

Users can mount the drive in any orientation using four screws in the side-mounting holes or four screws in the bottom-mounting holes. Refer to **Figure 3** for drive mounting dimensions. Follow these important mounting precautions when mounting the drive:

- Allow a minimum clearance of 0.030 inches (0.76mm) around the entire perimeter of the drive for cooling.
- Use only 6-32 UNC mounting screws.
- The screws should be inserted no more than 0.140 inch (3.56mm) into the bottom or side mounting holes.
- Do not overtighten the mounting screws (maximum torque: 6 inch-lb).

Figure 3 Mounting dimensions

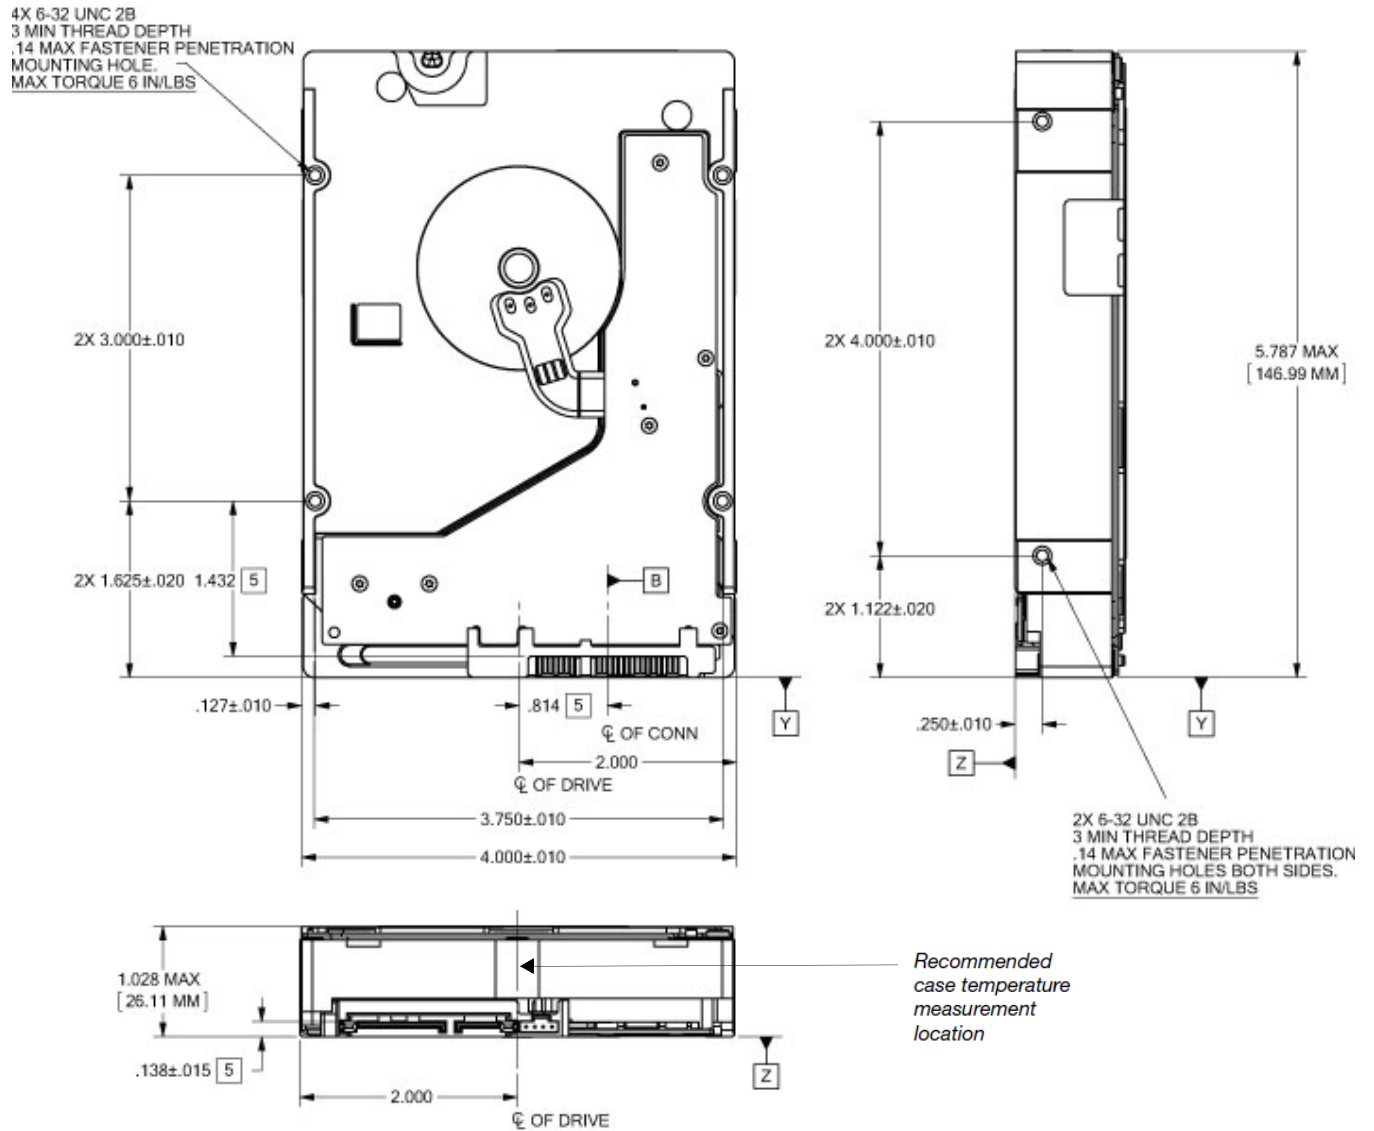

4.0 SATA Interface

These drives use the industry-standard Serial ATA (SATA) interface that supports FIS data transfers. It supports ATA programmed input/output (PIO) modes 0 to 4; multiword DMA modes 0 to 2, and Ultra DMA modes 0 to 6.

For detailed information about the SATA interface, refer to the “Serial ATA: High Speed Serialized AT Attachment” specification.

4.1 Hot-Plug compatibility

Archive HDD drives incorporate connectors which enable users to hot plug these drives in accordance with the SATA Revision 3.2 specification. This specification can be downloaded from www.serialata.org.

A Standby Immediate command should be issued and allowed to complete, and no more commands issued, prior to removing power from a drive. Consequences of not completing a Standby Immediate command and subjecting the drive to an unexpected power loss include the following:

- potentially longer time to ready on the subsequent power up; and
- if the drive was actively writing there may be unrecoverable sectors.

The existence of unrecoverable sectors may result in long command completion times for subsequent reads and writes in the vicinity of the LBAs that were actively being written when power was unexpectedly lost.

4.2 SATA device plug connector pin definitions

Table 5 summarizes the signals on the SATA interface and power connectors.

Table 5 SATA connector pin definitions

| Segment | Pin | Function | Definition |
|---|-----|----------------------|---|
| Signal | S1 | Ground | 2nd mate |
| | S2 | A+ | Differential signal pair A from Phy |
| | S3 | A- | |
| | S4 | Ground | 2nd mate |
| | S5 | B- | Differential signal pair B from Phy |
| | S6 | B+ | |
| | S7 | Ground | 2nd mate |
| Key and spacing separate signal and power segments | | | |
| Power | P1 | V ₃₃ | 3.3V power |
| | P2 | V ₃₃ | 3.3V power |
| | P3 | V ₃₃ | 3.3V power, pre-charge, 2nd mate |
| | P4 | Ground | 1st mate |
| | P5 | Ground | 2nd mate |
| | P6 | Ground | 2nd mate |
| | P7 | V ₅ | 5V power, pre-charge, 2nd mate |
| | P8 | V ₅ | 5V power |
| | P9 | V ₅ | 5V power |
| | P10 | Ground | 2nd mate |
| | P11 | Ground or LED signal | If grounded, drive does not use deferred spin |
| | P12 | Ground | 1st mate. |
| | P13 | V ₁₂ | 12V power, pre-charge, 2nd mate |
| | P14 | V ₁₂ | 12V power |
| | P15 | V ₁₂ | 12V power |

Notes

- All pins are in a single row, with a 1.27 mm (0.050 in) pitch.
- The comments on the mating sequence apply to the case of backplane blindmate connector only. In this case, the mating sequences are:
 - the ground pins P4 and P12.
 - the pre-charge power pins and the other ground pins.
 - the signal pins and the rest of the power pins.
- There are three power pins for each voltage. One pin from each voltage is used for pre-charge when installed in a blind-mate backplane configuration.
 - All used voltage pins (V_x) must be terminated.

4.3 Supported ATA commands

The following table lists SATA standard commands that the drive supports.

For a detailed description of the ATA commands, refer to the Serial ATA International Organization: Serial ATA Revision 3.2 (<http://www.sata-io.org>).

See "S.M.A.R.T. commands" on page 32 for details and subcommands used in the S.M.A.R.T. implementation.

Table 6 SATA standard commands

| Command name | Command code (in hex) |
|-------------------------------------|-----------------------------------|
| Check Power Mode | E5 _H |
| Device Configuration Freeze Lock | B1 _H / C1 _H |
| Device Configuration Identify | B1 _H / C2 _H |
| Device Configuration Restore | B1 _H / C0 _H |
| Device Configuration Set | B1 _H / C3 _H |
| Device Reset | 08 _H |
| Download Microcode | 92 _H |
| Execute Device Diagnostics | 90 _H |
| Flush Cache | E7 _H |
| Flush Cache Extended | EA _H |
| Format Track | 50 _H |
| Identify Device | EC _H |
| Idle | E3 _H |
| Idle Immediate | E1 _H |
| Initialize Device Parameters | 91 _H |
| Read Buffer | E4 _H |
| Read DMA | C8 _H |
| Read DMA Extended | 25 _H |
| Read DMA Without Retries | C9 _H |
| Read Log Ext | 2F _H |
| Read Multiple | C4 _H |
| Read Multiple Extended | 29 _H |
| Read Native Max Address | F8 _H |
| Read Native Max Address Extended | 27 _H |
| Read Sectors | 20 _H |
| Read Sectors Extended | 24 _H |
| Read Sectors Without Retries | 21 _H |
| Read Verify Sectors | 40 _H |
| Read Verify Sectors Extended | 42 _H |
| Read Verify Sectors Without Retries | 41 _H |
| Recalibrate | 10 _H |
| Security Disable Password | F6 _H |
| Security Erase Prepare | F3 _H |
| Security Erase Unit | F4 _H |
| Security Freeze | F5 _H |
| Security Set Password | F1 _H |

Table 6 SATA standard commands (continued)

| Command name | Command code (in hex) | |
|---|---|-----------------|
| Security Unlock | F2 _H | |
| Seek | 70 _H | |
| Set Features | EF _H | |
| Set Max Address | F9 _H | |
| Note: Individual Set Max Address commands are identified by the value placed in the Set Max Features register as defined to the right. | Address: | 00 _H |
| | Password: | 01 _H |
| | Lock: | 02 _H |
| | Unlock: | 03 _H |
| | Freeze Lock: | 04 _H |
| Set Max Address Extended | 37 _H | |
| Set Multiple Mode | C6 _H | |
| Sleep | E6 _H | |
| S.M.A.R.T. Disable Operations | B0 _H / D9 _H | |
| S.M.A.R.T. Enable/Disable Autosave | B0 _H / D2 _H | |
| S.M.A.R.T. Enable Operations | B0 _H / D8 _H | |
| S.M.A.R.T. Execute Offline | B0 _H / D4 _H | |
| S.M.A.R.T. Read Attribute Thresholds | B0 _H / D1 _H | |
| S.M.A.R.T. Read Data | B0 _H / D0 _H | |
| S.M.A.R.T. Read Log Sector | B0 _H / D5 _H | |
| S.M.A.R.T. Return Status | B0 _H / DA _H | |
| S.M.A.R.T. Save Attribute Values | B0 _H / D3 _H | |
| S.M.A.R.T. Write Log Sector | B0 _H / D6 _H | |
| Standby | E2 _H | |
| Standby Immediate | E0 _H | |
| Write Buffer | E8 _H | |
| Write DMA | CA _H | |
| Write DMA Extended | 35 _H | |
| Write DMA FUA Extended | 3D _H | |
| Write DMA Without Retries | CB _H | |
| Write Log Extended | 3F _H | |
| Write Multiple | C5 _H | |
| Write Multiple Extended | 39 _H | |
| Write Multiple FUA Extended | CE _H | |
| Write Sectors | 30 _H | |
| Write Sectors Without Retries | 31 _H | |
| Write Sectors Extended | 34 _H | |
| Write Uncorrectable | 45 _H | |
| ZAC Management In command template * | 4A _H / 00 _H | |
| ZAC Management Out command template * | 9F _H / 01 _H , 02 _H , 03 _H , 04 _H | |

* For specific ZAC command reference refer to the following documentation: T13 INCITS BSR 537, Zoned-device ATA Command Set (ZAC) (planned as ISO/IEC 17760-171)

4.3.1 ZAC Supported Capabilities log page

The Supported Capabilities log page (log 30, pg03h) provides a mechanism for the device which defines support for ZAC.

| Offset | Type | Content | |
|-----------|-------|----------------------------|---|
| 112 - 119 | QWord | Supported ZAC Capabilities | |
| | | Bit | Meaning |
| | | 63 | Contents of the QWord are valid |
| | | 62.5 | Reserved |
| | | 4 | Non-Data Reset Write Pointers Ext Supported bit |
| | | 3 | Non-Data Finish Zone Ext Supported bit |
| | | 2 | Non-Data Close Zone Ext Supported bit |
| | | 1 | Non-Data Open Zone Ext Supported bit |
| | | 0 | Reset Zones Ext Supported bit |
| 120 - 511 | | Reserved | |

*Additional detail defined by T13 INCITS BSR 537, Zoned-device ATA Command Set (ZAC) (planned as ISO/IEC 17760-171)

4.3.2 Identify Device command

The Identify Device command (command code EC_H) transfers information about the drive to the host following power up. The data is organized as a single 512-byte block of data, whose contents are shown in on page 24. All reserved bits or words should be set to zero. Parameters listed with an “x” are drive-specific or vary with the state of the drive.

The following commands contain drive-specific features that may not be included in the SATA specification.

Table 7 Identify Device commands

| Word | Description | Value |
|-------|---|-------------------|
| 0 | Configuration information: <ul style="list-style-type: none"> • Bit 15: 0 = ATA; 1 = ATAPI • Bit 7: removable media • Bit 6: removable controller • Bit 0: reserved | 0C5A _H |
| 1 | Number of logical cylinders | 16,383 |
| 2 | ATA-reserved | 0000 _H |
| 3 | Number of logical heads | 16 |
| 4 | Retired | 0000 _H |
| 5 | Retired | 0000 _H |
| 6 | Number of logical sectors per logical track: 63 | 003F _H |
| 7–9 | Retired | 0000 _H |
| 10–19 | Serial number: (20 ASCII characters, 0000 _H = none) | ASCII |
| 20 | Retired | 0000 _H |
| 21 | Retired | 0400 _H |
| 22 | Obsolete | 0000 _H |
| 23–26 | Firmware revision (8 ASCII character string, padded with blanks to end of string) | x.xx |
| 27–46 | Drive model number: (40 ASCII characters, padded with blanks to end of string) | |
| 47 | (Bits 7–0) Maximum sectors per interrupt on Read multiple and Write multiple (16) | 8010 _H |
| 48 | Reserved | 0000 _H |
| 49 | Standard Standby timer, IORDY supported and may be disabled | 2F00 _H |
| 50 | ATA-reserved | 0000 _H |
| 51 | PIO data-transfer cycle timing mode | 0200 _H |
| 52 | Retired | 0200 _H |
| 53 | Words 54–58, 64–70 and 88 are valid | 0007 _H |
| 54 | Number of current logical cylinders | xxxx _H |
| 55 | Number of current logical heads | xxxx _H |
| 56 | Number of current logical sectors per logical track | xxxx _H |
| 57–58 | Current capacity in sectors | xxxx _H |
| 59 | Number of sectors transferred during a Read Multiple or Write Multiple command | xxxx _H |

Table 7 Identify Device commands (continued)

| Word | Description | Value |
|---------|---|------------------------------|
| 60–61 | Total number of user-addressable LBA sectors available (see Section 2.1 for related information) *Note: The maximum value allowed in this field is: 0FFFFFFFh (268,435,455 sectors, 137GB). Drives with capacities over 137GB will have 0FFFFFFFh in this field and the actual number of user-addressable LBAs specified in words 100-103. This is required for drives that support the 48-bit addressing feature. | 0FFFFFFFh* |
| 62 | Retired | 0000 _H |
| 63 | Multiword DMA active and modes supported (see note following this table) | xx07 _H |
| 64 | Advanced PIO modes supported (modes 3 and 4 supported) | 0003 _H |
| 65 | Minimum multiword DMA transfer cycle time per word (120 nsec) | 0078 _H |
| 66 | Recommended multiword DMA transfer cycle time per word (120 nsec) | 0078 _H |
| 67 | Minimum PIO cycle time without IORDY flow control (240 nsec) | 0078 _H |
| 68 | Minimum PIO cycle time with IORDY flow control (120 nsec) | 0078 _H |
| 69 | Zoned ATA Feature support | 0001 _H |
| 70–74 | ATA-reserved | 0000 _H |
| 75 | Queue depth | 001F _H |
| 76 | SATA capabilities | xxxx _H |
| 77 | Reserved for future SATA definition | xxxx _H |
| 78 | SATA features supported | xxxx _H |
| 79 | SATA features enabled | xxxx _H |
| 80 | Major version number | 01F0 _H |
| 81 | Minor version number | 0028 _H |
| 82 | Command sets supported | 364B _H |
| 83 | Command sets supported | 7F09 _H |
| 84 | Command sets support extension (see note following this table) | 4163 _H |
| 85 | Command sets enabled | 30xx _H |
| 86 | Command sets enabled | BE09 _H |
| 87 | Command sets enable extension | 4163 _H |
| 88 | Ultra DMA support and current mode (see note following this table) | xx7F _H |
| 89 | Security erase time | 0039 _H |
| 90 | Enhanced security erase time | 0039 _H |
| 92 | Master password revision code | FFFE _H |
| 93 | Hardware reset value | xxxx _H |
| 94 | Automatic acoustic management | 8080 _H |
| 95–99 | ATA-reserved | 0000 _H |
| 100–103 | Total number of user-addressable LBA sectors available (see Section 2.1 for related information). These words are required for drives that support the 48-bit addressing feature. Maximum value: 0000FFFFFFFFFh. | ST8000AS0022 = 1,953,506,646 |
| 104–107 | ATA-reserved | 0000 _H |

Table 7 Identify Device commands (continued)

| Word | Description | Value |
|---------|---|--------------------------------------|
| 108–111 | The mandatory value of the world wide name (WWN) for the drive. NOTE: This field is valid if word 84, bit 8 is set to 1 indicating 64-bit WWN support. | Each drive will have a unique value. |
| 112–127 | ATA-reserved | 0000 _H |
| 128 | Security status | 0001 _H |
| 129–159 | Seagate-reserved | xxxx _H |
| 160–254 | ATA-reserved | 0000 _H |
| 255 | Integrity word | xxA5 _H |

| | |
|-------------|---|
| Note | Advanced Power Management (APM) and Automatic Acoustic Management (AAM) features are not supported. |
|-------------|---|

| | |
|-------------|---|
| Note | See the bit descriptions below for words 63, 84, and 88 of the Identify Drive data. |
|-------------|---|

| Description (if bit is set to 1) | | |
|----------------------------------|-------|--|
| | Bit | Word 63 |
| | 0 | Multiword DMA mode 0 is supported. |
| | 1 | Multiword DMA mode 1 is supported. |
| | 2 | Multiword DMA mode 2 is supported. |
| | 8 | Multiword DMA mode 0 is currently active. |
| | 9 | Multiword DMA mode 1 is currently active. |
| | 10 | Multiword DMA mode 2 is currently active. |
| | Bit | Word 84 |
| | 0 | SMART error login is supported. |
| | 1 | SMART self-test is supported. |
| | 2 | Media serial number is supported. |
| | 3 | Media Card Pass Through Command feature set is supported. |
| | 4 | Streaming feature set is supported. |
| | 5 | GPL feature set is supported. |
| | 6 | WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported. |
| | 7 | WRITE DMA QUEUED FUA EXT command is supported. |
| | 8 | 64-bit World Wide Name is supported. |
| | 9-10 | Obsolete. |
| | 11-12 | Reserved for TLC. |
| | 13 | IDLE IMMEDIATE command with IUNLOAD feature is supported. |
| | 14 | Shall be set to 1. |
| | 15 | Shall be cleared to 0. |

| | Bit | Word 88 |
|--|------------|---------------------------------------|
| | 0 | Ultra DMA mode 0 is supported. |
| | 1 | Ultra DMA mode 1 is supported. |
| | 2 | Ultra DMA mode 2 is supported. |
| | 3 | Ultra DMA mode 3 is supported. |
| | 4 | Ultra DMA mode 4 is supported. |
| | 5 | Ultra DMA mode 5 is supported. |
| | 6 | Ultra DMA mode 6 is supported. |
| | 8 | Ultra DMA mode 0 is currently active. |
| | 9 | Ultra DMA mode 1 is currently active. |
| | 10 | Ultra DMA mode 2 is currently active. |
| | 11 | Ultra DMA mode 3 is currently active. |
| | 12 | Ultra DMA mode 4 is currently active. |
| | 13 | Ultra DMA mode 5 is currently active. |
| | 14 | Ultra DMA mode 6 is currently active. |

4.3.3 Set Features command

This command controls the implementation of various features that the drive supports. When the drive receives this command, it sets BSY, checks the contents of the Features register, clears BSY and generates an interrupt. If the value in the register does not represent a feature that the drive supports, the command is aborted. Power-on default has the read look-ahead and write caching features enabled. The acceptable values for the Features register are defined as follows:

Table 8 Set Features command

| | |
|-----------------|--|
| 02 _H | Enable write cache (<i>default</i>) |
| 03 _H | Set transfer mode (based on value in Sector Count register) Sector Count register values: |
| | 00 _H Set PIO mode to default (PIO mode 2) |
| | 01 _H Set PIO mode to default and disable IORDY (PIO mode 2) |
| | 08 _H PIO mode 0 |
| | 09 _H PIO mode 1 |
| | 0A _H PIO mode 2 |
| | 0B _H PIO mode 3 |
| | 0C _H PIO mode 4 (<i>default</i>) |
| | 20 _H Multiword DMA mode 0 |
| | 21 _H Multiword DMA mode 1 |
| | 22 _H Multiword DMA mode 2 |
| | 40 _H Ultra DMA mode 0 |
| | 41 _H Ultra DMA mode 1 |
| | 42 _H Ultra DMA mode 2 |
| | 43 _H Ultra DMA mode 3 |
| | 44 _H Ultra DMA mode 4 |
| | 45 _H Ultra DMA mode 5 |
| | 46 _H Ultra DMA mode 6 |
| 06 _H | Enable the PUIS feature set |
| 07 _H | PUIS feature set device spin-up |
| 10 _H | Enable use of SATA features |
| 55 _H | Disable read look-ahead (read cache) feature |
| 82 _H | Disable write cache |
| 86 _H | Disable the PUIS feature set |
| 90 _H | Disable use of SATA features |
| AA _H | Enable read look-ahead (read cache) feature (<i>default</i>) |
| F1 _H | Report full capacity available |

Note

At power-on, or after a hardware or software reset, the default values of the features are as indicated above.

4.3.4 S.M.A.R.T. commands

S.M.A.R.T. provides near-term failure prediction for disk drives. When S.M.A.R.T. is enabled, the drive monitors predetermined drive attributes that are susceptible to degradation over time. If self-monitoring determines that a failure is likely, S.M.A.R.T. makes a status report available to the host. Not all failures are predictable. S.M.A.R.T. predictability is limited to the attributes the drive can monitor. For more information on S.M.A.R.T. commands and implementation, see the *Draft ATA-5 Standard*.

SeaTools diagnostic software activates a built-in drive self-test (DST S.M.A.R.T. command for D4_H) that eliminates unnecessary drive returns. The diagnostic software ships with all new drives and is also available at: <http://seatools.seagate.com>.

This drive is shipped with S.M.A.R.T. features disabled. Users must have a recent BIOS or software package that supports S.M.A.R.T. to enable this feature. The table below shows the S.M.A.R.T. command codes that the drive uses.

Table 9 S.M.A.R.T. commands

| Code in features register | S.M.A.R.T. command |
|---------------------------|--|
| D0 _H | S.M.A.R.T. Read Data |
| D2 _H | S.M.A.R.T. Enable/Disable Attribute Autosave |
| D3 _H | S.M.A.R.T. Save Attribute Values |
| D4 _H | S.M.A.R.T. Execute Off-line Immediate (runs DST) |
| D5 _H | S.M.A.R.T. Read Log Sector |
| D6 _H | S.M.A.R.T. Write Log Sector |
| D8 _H | S.M.A.R.T. Enable Operations |
| D9 _H | S.M.A.R.T. Disable Operations |
| DA _H | S.M.A.R.T. Return Status |

Note

If an appropriate code is not written to the Features Register, the command is aborted and 0x04 (abort) is written to the Error register.



Seagate Technology LLC

AMERICAS Seagate Technology LLC 10200 South De Anza Boulevard, Cupertino, California 95014, United States, 408-658-1000

ASIA/PACIFIC Seagate Singapore International Headquarters Pte. Ltd. 7000 Ang Mo Kio Avenue 5, Singapore 569877, 65-6485-3888

EUROPE, MIDDLE EAST AND AFRICA Seagate Technology SAS 16-18 rue du Dôme, 92100 Boulogne-Billancourt, France, 33 1-4186 10 00

Publication Number: 100795782, Rev. A

January 2016